


WAAS CH 86717 W17A	APP CRS 175°	Rwy Ldg 13503 TDZE 1922 Apt Elev 1922
--	------------------------	--

RNAV (GPS) RWY 17R



CLINTON/SHERMAN (CSM)

<p>▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -12°C (11°F) or above 54°C (130°F). Circling NA east of Rwy 17R-35L. DME/DME RNP-0.3 NA.</p>	<p>MISSED APPROACH: Climb to 2500 then climbing right turn to 4100 direct JETVE and hold.</p>			
ASOS 118.45	FORT WORTH CENTER 128.4 269.37	CLINTON/SHERMAN TOWER* 119.6 (CTAF) 0 256.9	GND CON 121.7 239.0	UNICOM 122.95

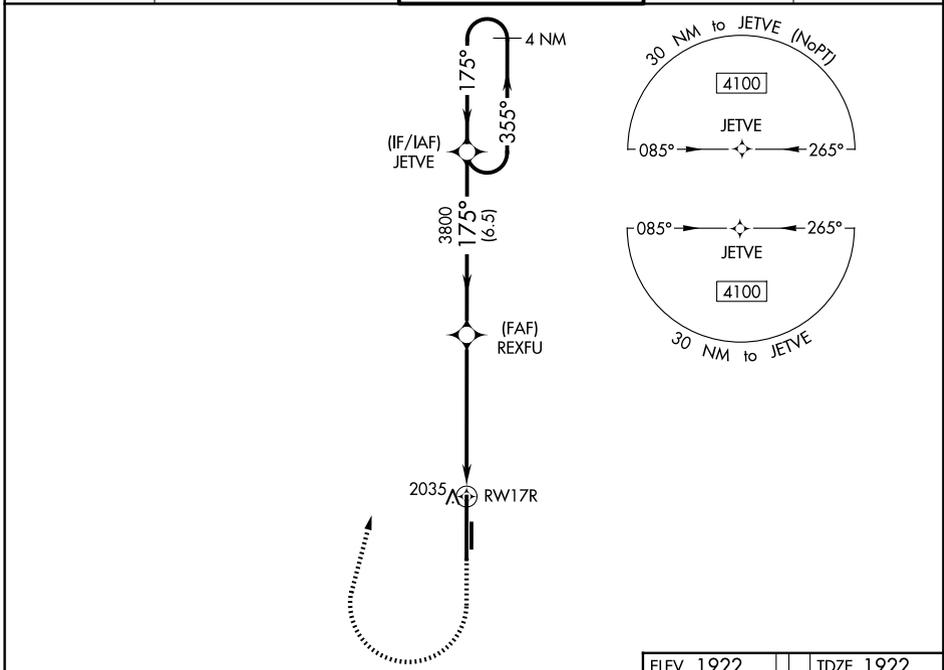


SC-1, 19 FEB 2026 to 19 MAR 2026

SC-1, 19 FEB 2026 to 19 MAR 2026

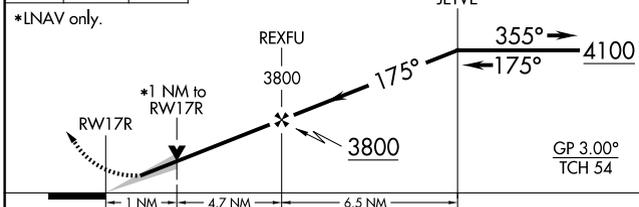

	ELEV 1922		TDZE 1922		
	2500	4100	JETVE		
	*LNAV only.				
	<p>RWY 17R (1 NM) → REXFU (4.7 NM) → JETVE (6.5 NM) → 4100</p>				
CATEGORY	A	B	C	D	E
LPV DA	2122-3/4		200 (200-3/4)		
LNAV/VNAV DA	2234-1		312 (400-1)		
LNAV MDA	2300-1		378 (400-1)		
CIRCLING	2340-1 418 (500-1)	2380-1 458 (500-1)	2380-1 1/2 458 (500-1 1/2)	2620-2 1/4 698 (700-2 1/4)	2620-2 1/2 698 (700-2 1/2)

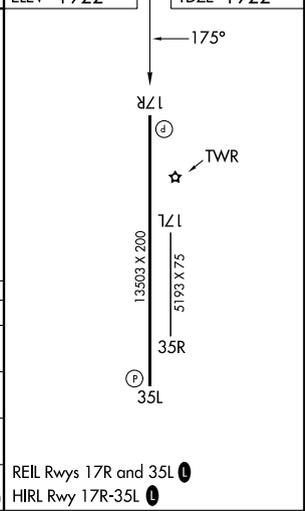

REIL Rwy 17R and 35L
HIRL Rwy 17R-35L