

WAAS CH <b>42902</b> <b>W36A</b>	APP CRS <b>002°</b>	Rwy Ldg TDZE Apt Elev	<b>8201</b> <b>684</b> <b>695</b>
--	------------------------	-----------------------------	---

# RNAV (GPS) RWY 36


GREEN BAY/AUSTIN STRAUBEL INTL (GRB)

**RNP APCH.**



For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 6000 and LNAV Cats C/D visibility to RVR 5500.  
\*\* RVR 1800 authorized with use of FD or AP or HUD to DA.

**MALS R** MISSED APPROACH: Climb to 2500 direct ANEPE and hold.

<b>ATIS</b> <b>124.1</b>	<b>GREEN BAY APP CON*</b> <b>119.4 338.2</b>	<b>GREEN BAY TOWER*</b> <b>118.7(CTAF) 257.8</b>	<b>GND CON</b> <b>121.9</b>
-----------------------------	---	---	--------------------------------

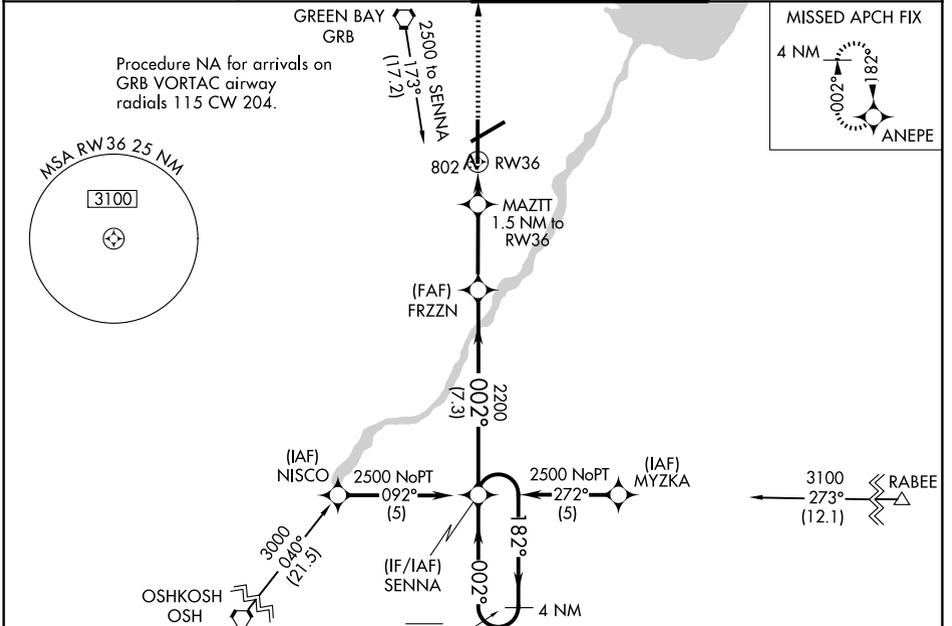

ELEV 695	<b>D</b>	TDZE 684
----------	----------	----------

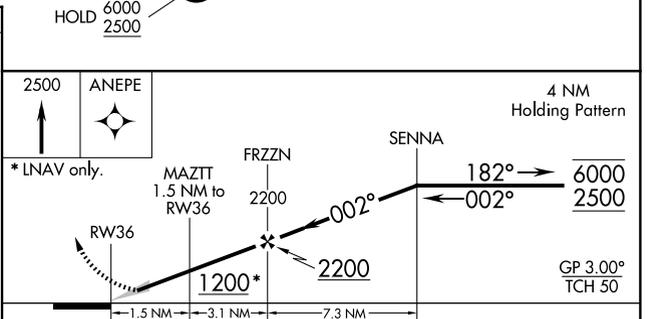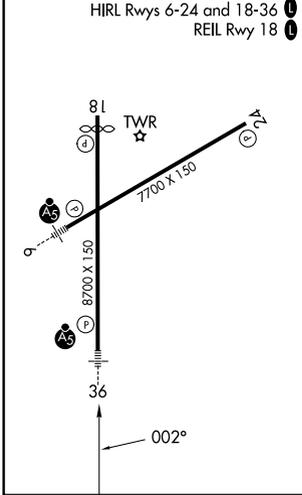

CATEGORY	A	B	C	D
LPV DA	884/24		200 (200-½)	
LNAV/VNAV DA	1097/40		413 (500-¾)	
LNAV MDA	1060/24	376 (400-½)	1060/35	376 (400-¾)
CIRCLING	1200-1	505 (600-1)	1300-1¾ 605 (700-1¾)	1300-2 605 (700-2)

EC-3, 19 FEB 2026 to 19 MAR 2026

EC-3, 19 FEB 2026 to 19 MAR 2026