

LOC I-AUM 110.55	APP CRS 351°	Rwy Ldg TDZE Apt Elev	5800 1231 1234
----------------------------	------------------------	-----------------------------	---


ILS or LOC RWY 35

AUSTIN MUNI (AUM)

NA When local altimeter setting not received, use Albert Lea altimeter setting and increase all DA 48 feet and all MDA 60 feet; increase Circling Cat C/D visibility ¼ SM. For inoperative MALSRS, increase S-LOC 35 Cats C and D visibility to 1 ⅜ mile.



MALSRS MISSED APPROACH: Climb to 1800 then climbing right turn to 3800 on heading 179° and MCW VOR/DME R-034 to FARUN INT and hold.

AWOS-3 119.025	ROCHESTER APP CON* 119.8 251.125	UNICOM 122.7 (CTAF)
--------------------------	--	-------------------------------

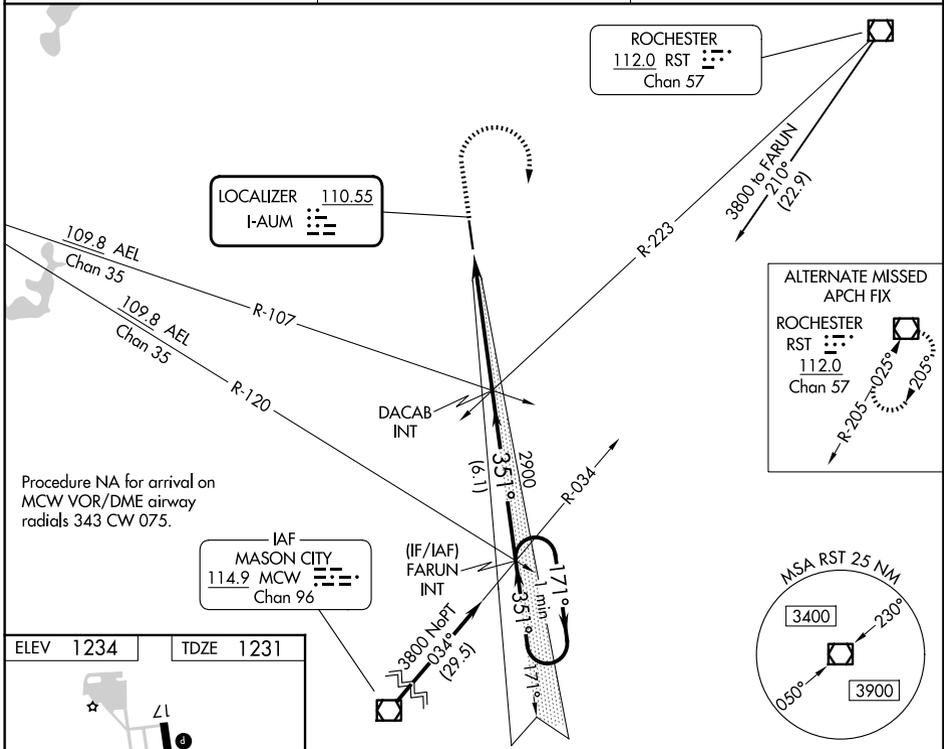

Procedure NA for arrival on MCW VOR/DME airway radials 343 CW 075.

ELEV 1234	TDZE 1231
-----------	-----------

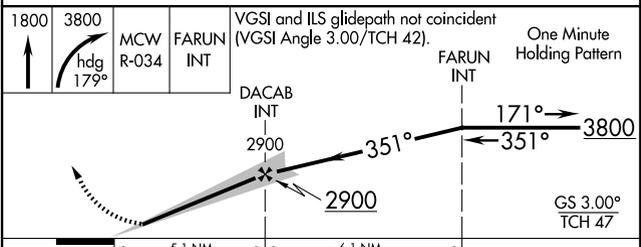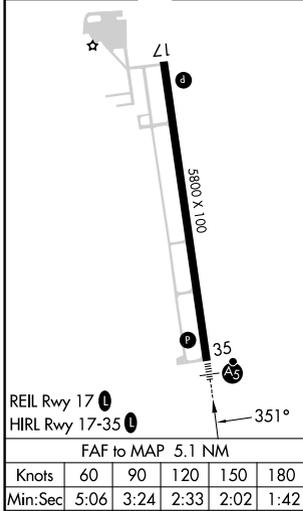

CATEGORY	A	B	C	D
S-ILS 35	1431-½		200 (200-½)	
S-LOC 35	1700-½	469 (500-½)	1700-1	469 (500-1)
CIRCLING	1740-1	506 (600-1)	1800-1½	1880-2
			566 (600-1½)	646 (700-2)

NC-1, 19 FEB 2026 to 19 MAR 2026

NC-1, 19 FEB 2026 to 19 MAR 2026