


LOC/DME I-OND 111.55 Chan 52 (Y)	APP CRS 267°	Rwy Ldg TDZE Apt Elev 9000 95 96
--	------------------------	--

ILS or LOC RWY 26R


GEORGE BUSH INTCNL/HOUSTON (IAH)

DME required. From HOOI: RNAV 1-GPS required.	ALSF-2 	MISSED APPROACH: Climb to 600 then climbing right turn to 3000 on IAH VORTAC R-344 to PEPBI INT/IAH 20 DME and hold.
Simultaneous approach authorized with Rwy 26L and Rwy 27. For inop ALS, increase S-ILS 26R Cat E visibility to RVR 4000, and S-LOC 26R Cat C/D/E visibility to 1 3/8 SM.		

D-ATIS 124.05	HOUSTON APP CON 120.05 379.1 E 124.35 316.15 W	HOUSTON TOWER 120.725 290.2	GND CON 118.575
-------------------------	--	---------------------------------------	---------------------------

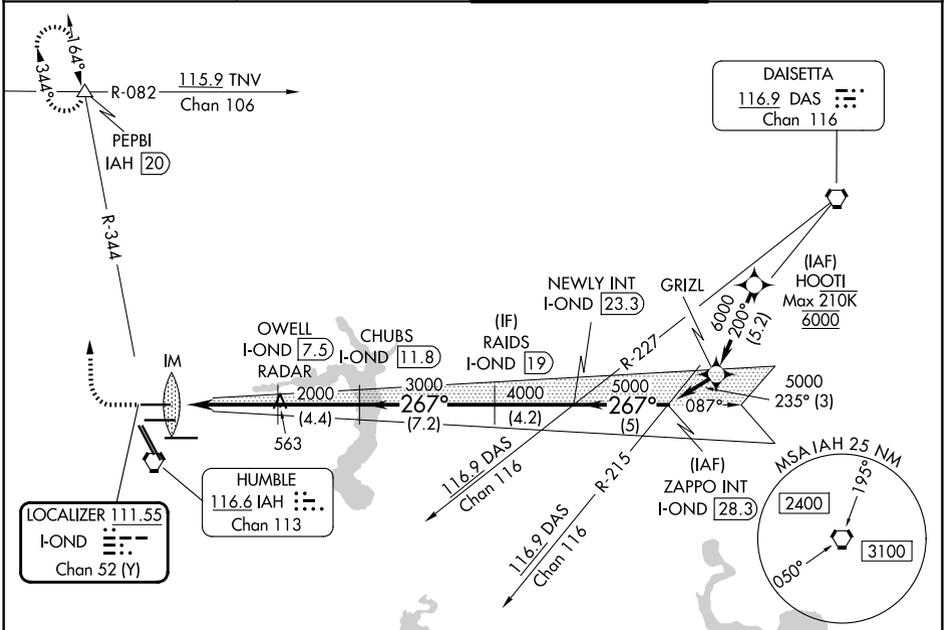

ELEV 96	D TDZE 95						
600	3000	PEPBI	OWELL I-OND 7.5	CHUBS I-OND 11.8	RAIDS I-OND 19	NEWLY INT I-OND 23.3	ZAPPO INT I-OND 28.3
			RADAR				
* LOC only							
I-OND 1.7	*I-OND 2.9	2000	3000	4000	5000	GS 3.00°	TCH 59
0.1	1.1	4.6 NM	4.4 NM	7.2 NM	4.2 NM	5 NM	
CATEGORY	A	B	C	D	E		
S-ILS 26R	295/18		200 (200-1/2)				
S-LOC 26R	580/24	485 (500-1/2)	580/50		485 (500-1)		

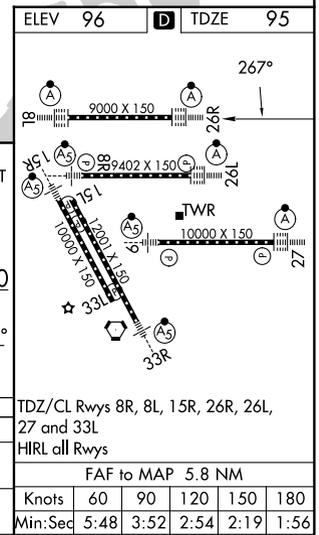

SC-5, 19 FEB 2026 to 19 MAR 2026

SC-5, 19 FEB 2026 to 19 MAR 2026

TDZ/CL Rwy 8R, 8L, 15R, 26R, 26L, 27 and 33L					
HIRL all Rwy					
FAF to MAP 5.8 NM					
Knots	60	90	120	150	180
Min:Sec	5:48	3:52	2:54	2:19	1:56