





| | | |
|--|------------------------|--|
| WAAS CH 50109 W17A | APP CRS 174° | Rwy Idg TDZE 6705 1530 Apt Elev 1533 |
|--|------------------------|--|

RNAV (GPS) RWY 17

NEWTON-CITY-COUNTY (E WK)

| | | | |
|-----------|---|--------------|--|
| RNP APCH. | <p>⚠ When local altimeter setting not received, use Wichita Dwight D Eisenhower Ntl altimeter setting: increase LPV DA to 1891 feet and visibility 1/2 SM; increase all MDAs 100 feet and visibility Cat C and LNAV Cat D 1/4 SM. VDP NA when using Wichita Dwight D Eisenhower Ntl altimeter setting. For inop ALS, increase LPV visibility to 2/5 SM and LNAV Cat C/D to 1 3/5 SM. For inop ALS when using Wichita Dwight D Eisenhower Ntl altimeter setting, increase LPV visibility to 1 SM. Circling Rwy 8, 26 NA at night.</p> | <p>MALSR</p> | <p>MISSED APPROACH: Climb to 3600 direct SPINA and hold.</p> |
| | | | |

| | | | |
|----------------------------|---------------------------------------|---------------------------|--|
| AWOS-3PT 123.875 | WICHITA APP CON 125.5 306.2 | CLNC DEL 126.55 | UNICOM 123.0 (CTAF) 0 |
|----------------------------|---------------------------------------|---------------------------|--|

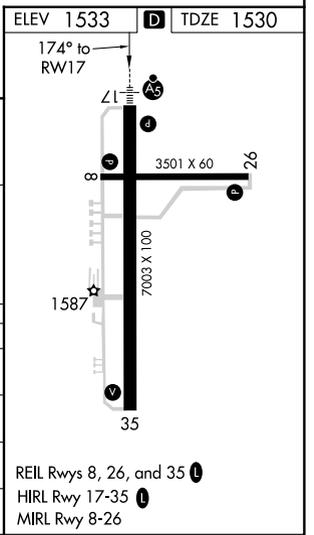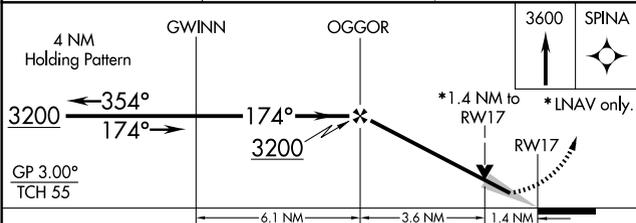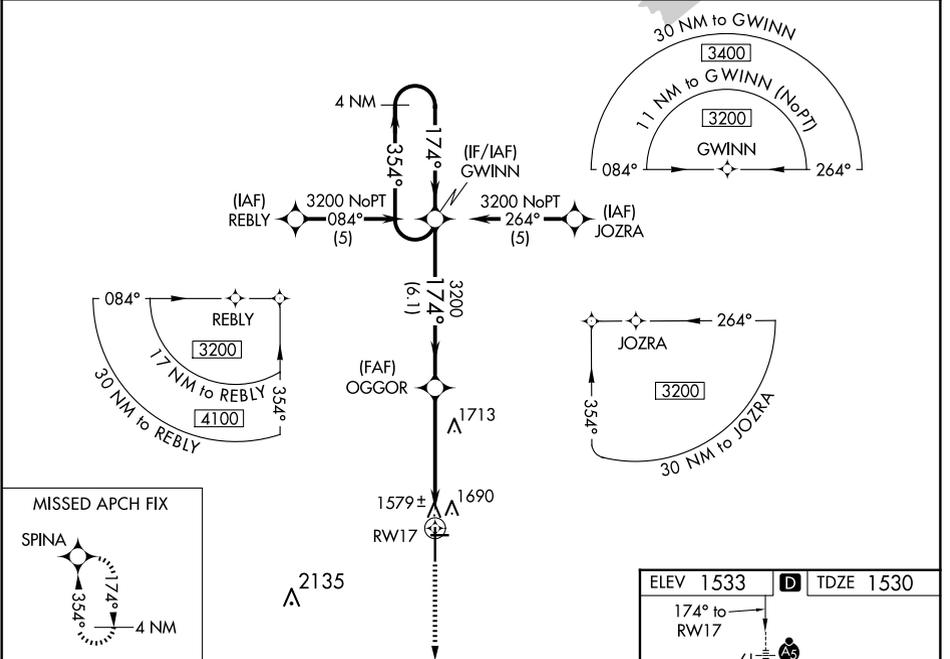

| CATEGORY | A | B | C | D |
|--------------|------------------------|----------------------------|--------------------|---|
| LPV DA | 1791-1/2 261 (300-1/2) | | | |
| LNAV/VNAV DA | NA | | | |
| LNAV MDA | 2020-1/2 490 (500-1/2) | 2020-1 490 (500-1) | | |
| CIRCLING | 2020-1 487 (500-1) | 2020-1 1/2 487 (500-1 1/2) | 2100-2 567 (600-2) | |

NC-2, 19 FEB 2026 to 19 MAR 2026

NC-2, 19 FEB 2026 to 19 MAR 2026