

WAAS CH 56522 W19A	APP CRS 190°	Rwy Idg TDZE Apt Elev	5001 1245 1255
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 19



NEOSHO HUGH ROBINSON (E/O S)


⚠

When VGSi inop, Circling Rwy 1 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. When local altimeter setting not received, use Joplin altimeter setting and increase all DA 87 feet and all MDA 100 feet; increase LPV all Cats visibility ½ mile, LNAV/VNAV all Cats visibility ¾ mile, and LNAV Cat C visibility ½ mile. VDP and Baro-VNAV NA when using Joplin altimeter setting.

MISSED APPROACH: Climb to 3300 direct RUKOC and hold.

KANSAS CITY CENTER 128.6 282.325	AUNICOM 122.8 (CTAF) 0
--	----------------------------------

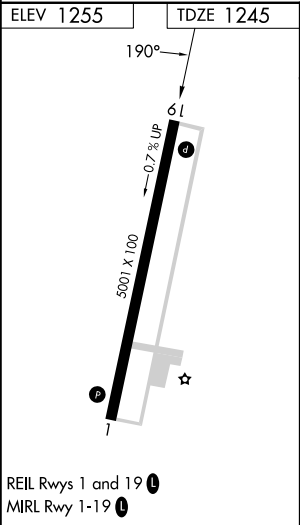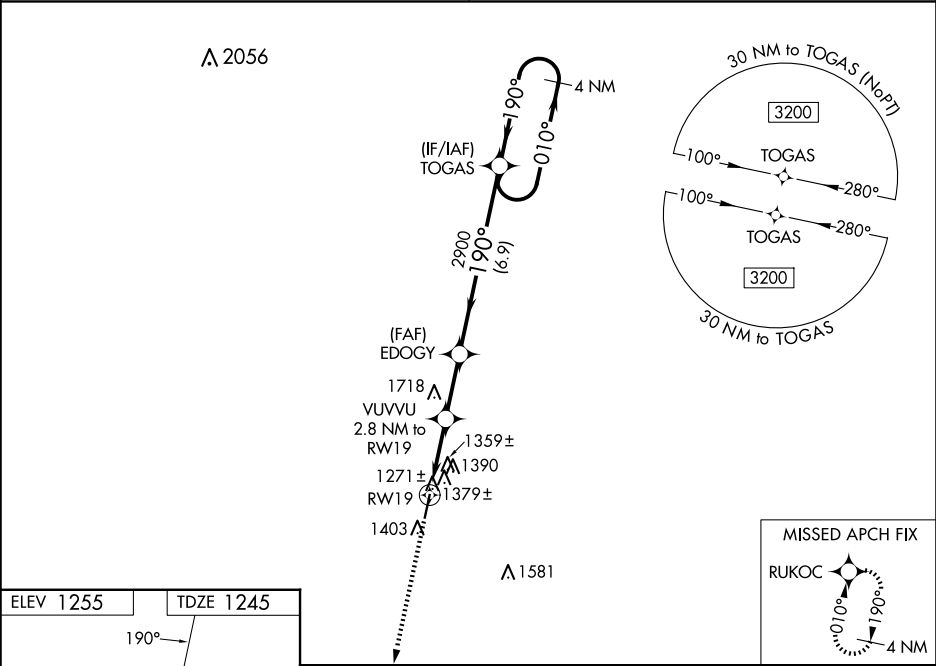

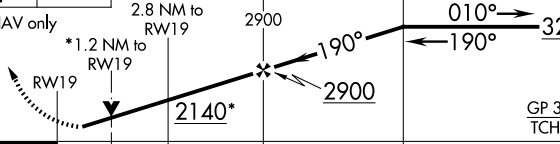3300 ↑	RUKOC 				
*LNAV only		GP 3.00° TCH 40			
CATEGORY		A	B	C	D
LPV DA		1495-1 250 (300-1)			NA
LNAV/VNAV DA		1692-1½ 447 (500-1½)			NA
LNAV MDA		1640-1 395 (400-1)		1640-1¼ 395 (400-1¼)	NA
CIRCLING		1720-1 465 (500-1)	1740-1 485 (500-1)	1740-1½ 485 (500-1½)	NA