

WAAS CH 77882 W16A	APP CRS 155°	Rwy Ldg TDZE Apt Elev	5310 689 689
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 16


ABERNATHY FLD (GZS)

RNP APCH - GPS.

▽ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C.
▲ NA Baro-VNAV and VDP NA when using MDQ altimeter setting. Rwy 16 helicopter visibility reduction below 3/4 SM NA. When local altimeter setting not received, use MDQ altimeter setting: increase LPV DA to 1245 feet, and all visibilities 1/4 SM; increase LNAV/VNAV DA to 1362 feet and all visibilities 1/8 SM; increase all MDAs 100 feet and LNAV visibility Cat B 1/4 SM, Cats C and D 1/8 SM, and Circling visibility Cats A and B 1/4 SM and Cat C 1/2 SM.



MISSED APPROACH:
Climb to 3000 direct ZEWGU and hold.

AWOS-3 118.275	MEMPHIS CENTER 125.85 379.25	UNICOM 122.8 (CTAF)
--------------------------	--	-------------------------------

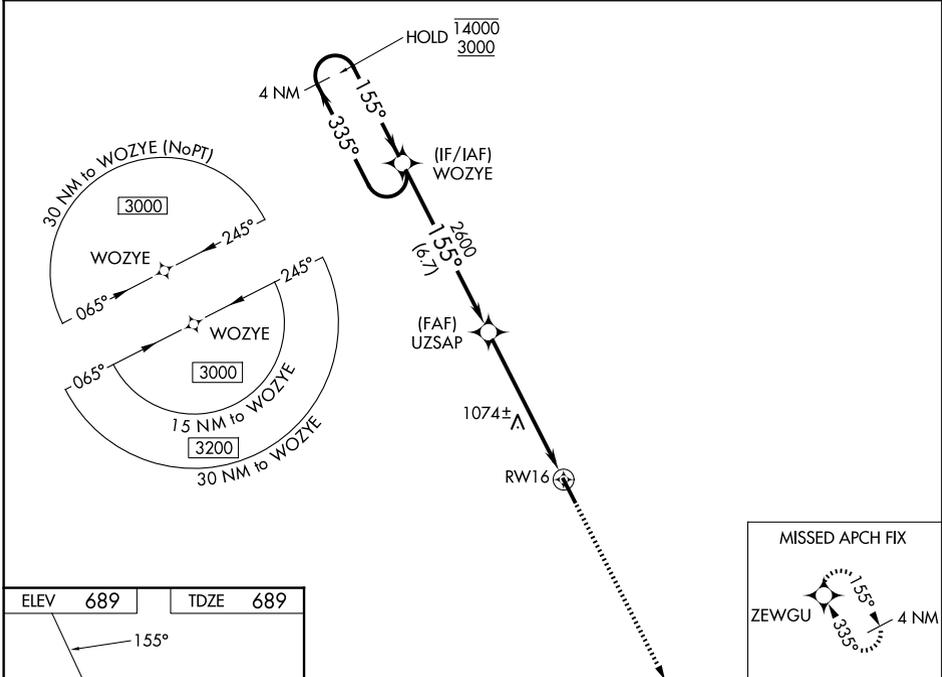

SE-1, 19 FEB 2026 to 19 MAR 2026

SE-1, 19 FEB 2026 to 19 MAR 2026

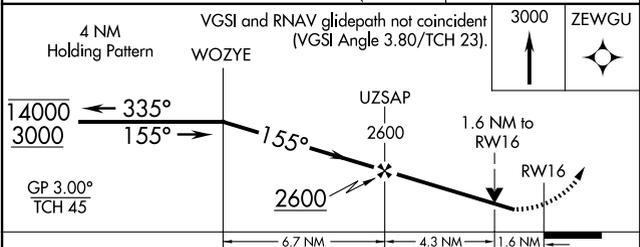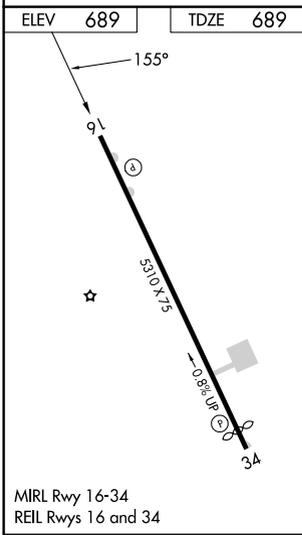

CATEGORY	A	B	C	D
LPV DA	1164-1 ³ / ₈ 475 (500-1 ³ / ₈)			
LNAV/VNAV DA	1281-1 ³ / ₄ 592 (600-1 ³ / ₄)			
LNAV MDA	1340-1	651 (700-1)	1340-1 ⁷ / ₈	651 (700-1 ⁷ / ₈)
CIRCLING	1420-1 731 (800-1)	1480-1 791 (800-1)	1480-2 ¹ / ₄ 791 (800-2 ¹ / ₄)	1640-3 951 (1000-3)