

WAAS Chan 99700 W36A	APP CRS 357°	Rwy Ldg 5002 TDZE 86 Apr Elev 86
--	------------------------	---

RNAV (GPS) RWY 36




VICKSBURG TALLULAH RGNL (TVR)

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -8°C (18°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Vicksburg Muni, MS altimeter setting and increase LPV DA to 309 feet, LNAV/VNAV DA to 516 feet all visibilities 1/8 mile; increase all MDA 40 feet and visibility Cats C/D 1/4 mile. Baro-VNAV and VDP NA with Vicksburg Muni, MS altimeter setting.


SSALR
43

MISSED APPROACH:
Climb to 2000 direct DEXIW and hold.


ASOS 118.525	MEMPHIS CENTER 132.5 259.1	UNICOM 123.0 (CTAF) 0
------------------------	--------------------------------------	---------------------------------

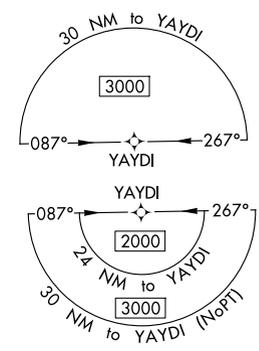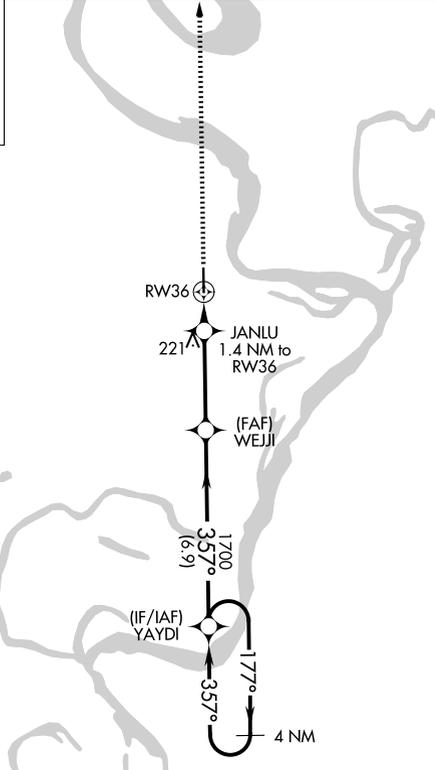

ELEV 86	D	TDZE 86
---------	----------	---------

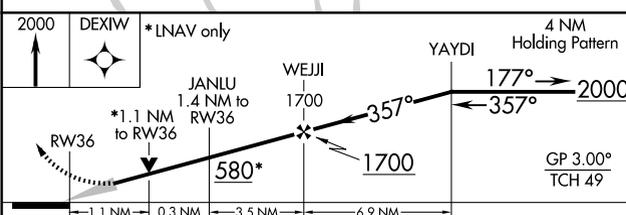

CATEGORY	A	B	C	D
LPV DA		286-1/2	200 (200-1/2)	
LNAV/VNAV DA		493-7/8	407 (500-7/8)	
LNAV MDA	480-1/2	394 (400-1/2)	480-5/8	394 (400-3/8)
CIRCLING	540-1	454 (500-1)	720-1 3/4 634 (700-1 3/4)	720-2 634 (700-2)

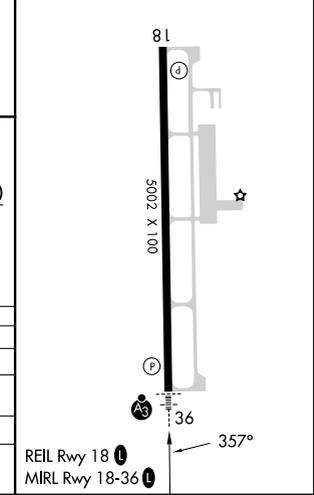

SC-4, 19 FEB 2026 to 19 MAR 2026

SC-4, 19 FEB 2026 to 19 MAR 2026