

TAMPA, FLORIDA

AL-9241 (FAA)

25219

LOC/DME I-VDF <b>111.35</b> Chan 50 (Y)	APP CRS <b>226°</b>	Rwy Ldg TDZE Apt Elev	<b>4200</b> <b>21</b> <b>21</b>
---	------------------------	-----------------------------	---------------------------------------


# ILS or LOC RWY 23

TAMPA EXEC (VDF)

**⚠** When local altimeter setting not received, use Tampa Intl altimeter setting and increase S-ILS 23 DA to 323; increase all MDA 40 feet and S-LOC and Circling Cat C visibilities ¼ SM. For inop MALSRL when using Tampa Intl altimeter setting, increase S-LOC 23 Cat C visibility to 1½. Inop table does not apply to S-ILS 23 and S-LOC 23 Cats A/B. Rwy 23 helicopter visibility reduction below ¾ SM NA. Circling Rwy 18, 36 NA at night.

**MALSRL** MISSED APPROACH: Climb to 800 then climbing left turn to 2000 direct LAL VORTAC and hold.

AWOS-3 <b>121.125</b>	TAMPA APP CON <b>119.9 290.3</b>	UNICOM <b>122.7 (CTAF) 0</b>
--------------------------	-------------------------------------	---------------------------------

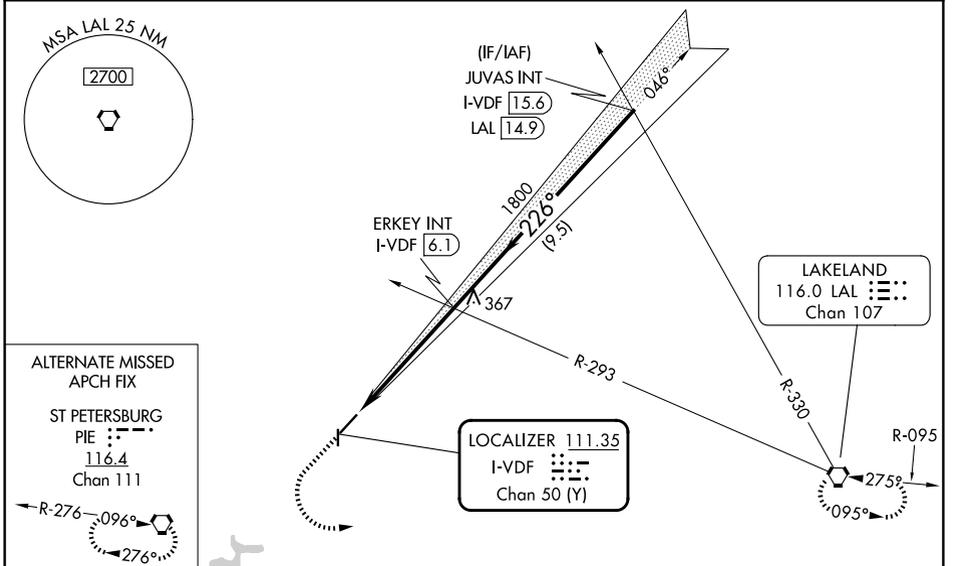

ELEV 21	<b>D</b>	TDZE 21			
REIL Rws 5, 18, and 36					
MIRL Rws 5-23 and 18-36					
FAF to MAP 5.3 NM					
Knots	60	90	120	150	180
Min:Sec	5:18	3:32	2:39	2:07	1:46

800	2000	LAL	ERKEY INT I-VDF 6.1	JUVAS INT I-VDF 15.6
CATEGORY	A	B	C	D
S-ILS 23	298-1	277 (300-1)		NA
S-LOC 23	560-1	539 (600-1)		NA
CIRCLING	560-1 539 (600-1)	760-1 739 (800-1)	800-2¼ 779 (800-2¼)	NA

TAMPA, FLORIDA  
Amdt 1E 07OCT21

28°01'N-82°21'W

# ILS or LOC RWY 23

TAMPA EXEC (VDF)

SE-3, 19 FEB 2026 to 19 MAR 2026

SE-3, 19 FEB 2026 to 19 MAR 2026