ILS or LOC RWY 23L

INDIANAPOLIS INTL (IND)

LOC/DME I-FVJ	APP CRS	Rwy Ldg	TDZE	Apt Elev
111.15 Chan 48 (Y)	230°	10000	790	796

Simultaneous approach authorized.
* RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR

MISSED APPROACH: Climb to 1500 then climbing left turn to 3000 on heading 100° and on VHP VORTAC R-136 to OZMOE INT/VHP 20.1 DME and hold.

D-ATIS	INDIANAPOLIS APP CON	INDY TOWER	GND CON	CLNC DEL	CPDLC
134.25	128.175 317.8	120.9 251.1	121.9	128.75 251.1	

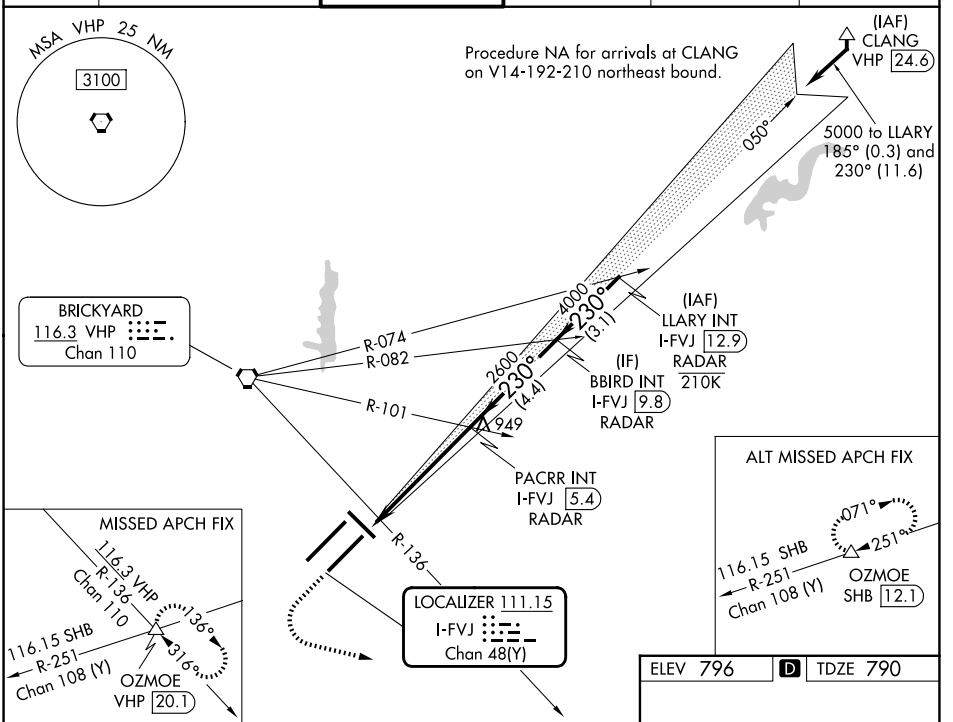

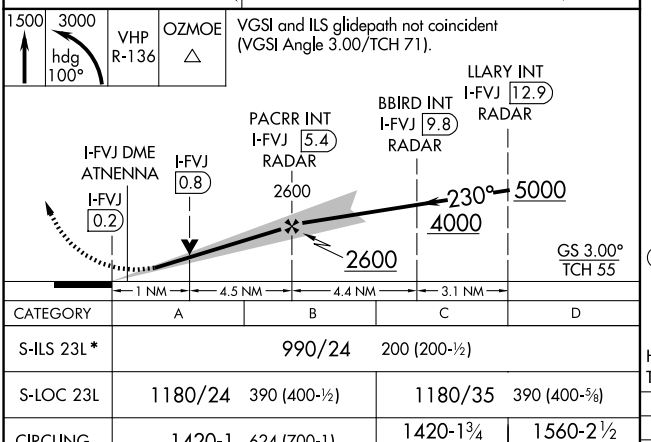

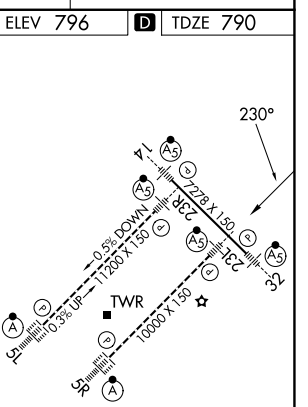

CATEGORY	A	B	C	D
S-ILS 23L*	990/24 200 (200-½)			
S-LOC 23L	1180/24 390 (400-½)		1180/35 390 (400-⅝)	
CIRCLING	1420-1 624 (700-1)		1420-1¾ 624 (700-1¾)	1560-2½ 764 (800-2½)

HIRL all Rwys
TDZ/CL Rwys 5L and 5R

FAF to MAP 5.5 NM

Knots	60	90	120	150	180
Min:Sec	5:30	3:40	2:45	2:12	1:50

EC-2, 19 MAR 2026 to 16 APR 2026
EC-2, 19 MAR 2026 to 16 APR 2026