

WAAS CH 90101 W17B	APP CRS 170°	Rwy Ldg TDZE 499 Apt Elev 501	7800
--	------------------------	---	-------------

RNAV (GPS) Y RWY 17L


LOUISVILLE MUHAMMAD ALI INTL (SDF)

RNP APCH - GPS.

⚠ Simultaneous approach authorized. Circling Rwy 11 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -13°C or above 54°C. LNAV procedure NA during simultaneous operations. Use of FD or AP required during simultaneous operations. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 6000.


MALSR 	MISSED APPROACH: Climb to 1000 then climbing left turn to 3000 direct ILL VORTAC and hold, continue climb-in-hold to 3000.
-----------	--

D-ATIS 118.725	LOUISVILLE APP CON 132.075 327.0	LOUISVILLE TOWER 124.2 257.8	GND CON 121.7 348.6
--------------------------	--	--	-------------------------------

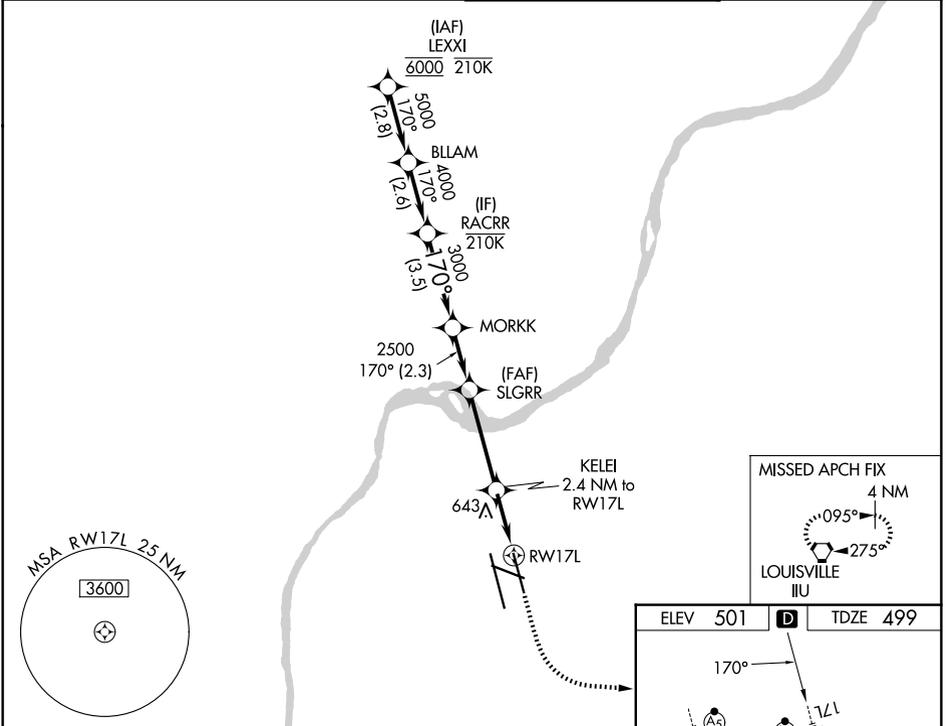

VGSI and RNAV glidepath not coincident (VGSI Angle 3.32/TCH 71).

	1000	3000	ILL
	↑	↷	⬠
RACRR	MORKK	SLGRR	KELEI
4000	3000	2500	2.4 NM to RW17L
GP 3.00° TCH 55	170°	1320	1 NM to RW17L
3.5 NM	2.3 NM	3.7 NM	1.4 NM
A	B	C	D
CATEGORY	LPV DA	LNAV/VNAV DA	LNAV MDA
	699/18	909/40	920/24
	200 (200-½)	410 (500-¾)	421 (500-½)
	1040-1	1160-1¾	1400-3
	539 (600-1)	659 (700-1¾)	899 (900-3)

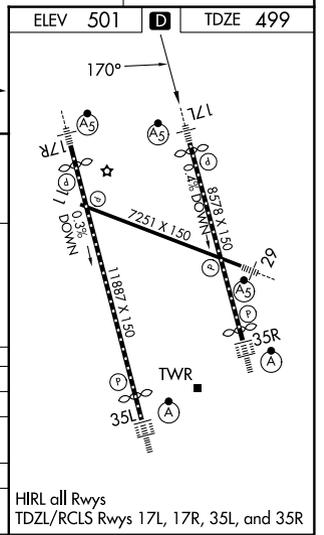

SE-1, 19 MAR 2026 to 16 APR 2026

SE-1, 19 MAR 2026 to 16 APR 2026