


APP CRS <b>054°</b>	Rwy Ldg <b>10000</b> TDZE <b>384</b> Apt Elev <b>435</b>
------------------------	--

# RNAV (RNP) Z RWY 5L

RALEIGH-DURHAM INTL (RDU)


RNP AR APCH-GPS.				MALSR	MISSED APPROACH: Climb to 1000 then climbing left turn to 2200 direct DUHAM and hold.
<p>▼ For uncompensated Baro-VNAV systems, procedure NA below -1°C or above 54°C. Simultaneous approach authorized, except for arrivals at HEAVE. For inop ALS, increase RNP 0.10 all Cats visibility to RVR 4500.</p>					
D-ATIS <b>123.8</b>	RALEIGH APP CON <b>127.675 307.9</b>	RALEIGH TOWER <b>127.45 257.8</b>	GND CON <b>121.9 348.6</b>	CLNC DEL <b>120.1</b>	CPDLC

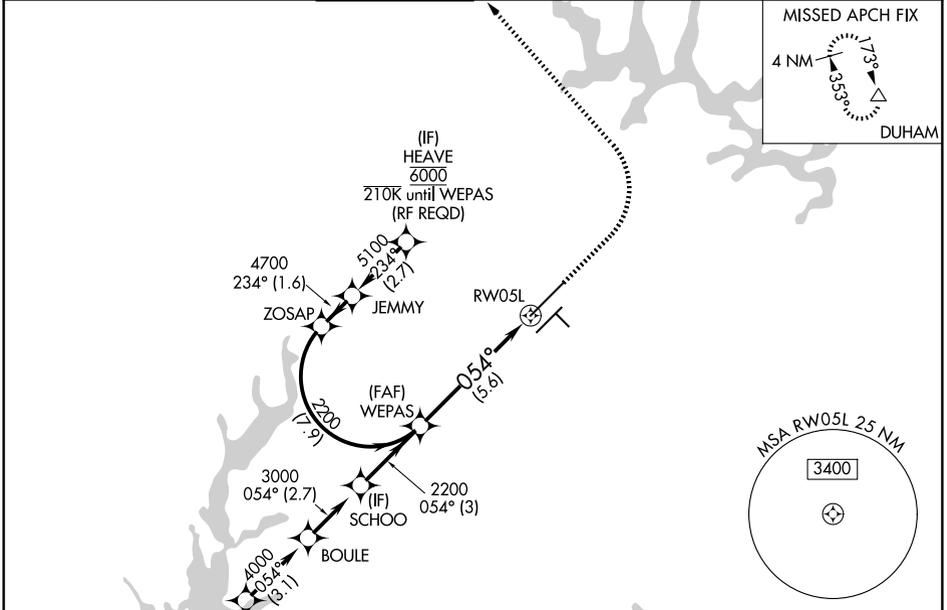

SE-2, 19 MAR 2026 to 16 APR 2026


SE-2, 19 MAR 2026 to 16 APR 2026

ELEV 435	<b>D</b> TDZE 384
----------	-------------------

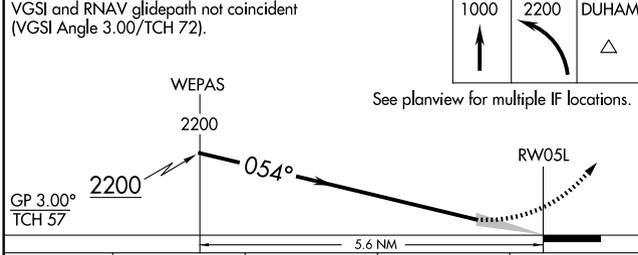

CATEGORY	A	B	C	D
RNP 0.10 DA		684/24	300 (300-½)	
RNP 0.30 DA		780/35	396 (400-⅝)	

**AUTHORIZATION REQUIRED**

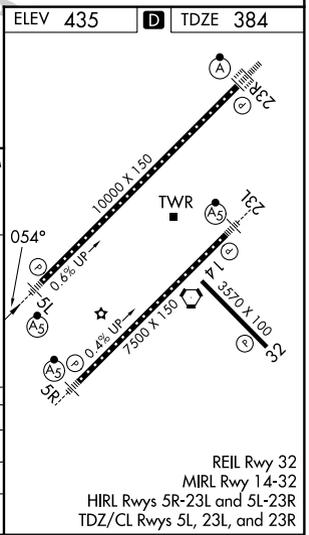

REIL Rwy 32  
MIRL Rwy 14-32  
HIRL Rwys 5R-23L and 5L-23R  
TDZ/CL Rwys 5L, 23L, and 23R