


LOC I-CSG 110.3	APP CRS 056°	Rwy Ldg 6997
		TDZE 380
		Apt Elev 398



ILS or LOC RWY 6

COLUMBUS (CSG)

ADF or RADAR required.			MISSED APPROACH: Climb to 1000, then climbing left turn to 2700 direct FENIX LOM and hold, continue climb-in-hold to 2700.	
Circling to Rwy 13, 24 and 31 NA at night. Autopilot coupled approach NA below 900. Rwy 6 helicopter visibility reduction below 3/4 SM NA. For inop ALS, increase S-ILS 06 all Cats visibility to RVR 4500. For inop ALS, increase S-LOC 06 Cats A and B visibility to RVR 5500 and Cats C and D visibility to 1 1/4 SM.				
ATIS 127.75	ATLANTA APP CON * 125.5 323.1	COLUMBUS TOWER * 120.1 (CTAF) 257.8		GND CON 121.9 348.6
				UNICOM 122.95

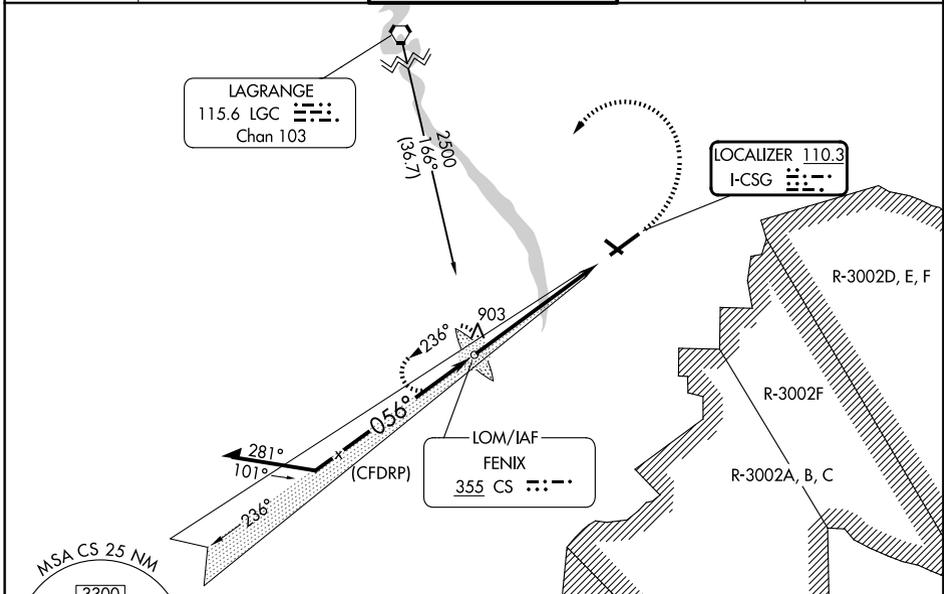

ELEV 398	D	TDZE 380
----------	---	----------

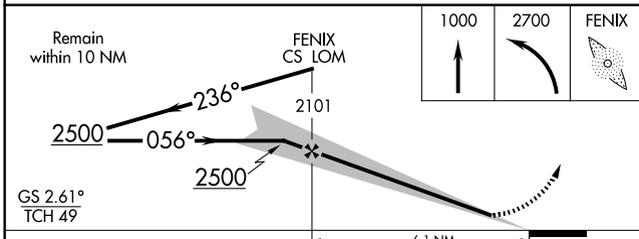

CATEGORY	A	B	C	D
S-ILS 6		664/40	284 (300-3/4)	
S-LOC 6	1020/40	640 (700-3/4)	1020-1 3/8	640 (700-1 3/8)
CIRCLING	1020-1	622 (700-1)	1140-2 1/4 742 (800-2 1/4)	1300-3 902 (1000-3)

REIL Rwy 24	
HIRL Rwy 6-24	
MIRL Rwy 13-31	
REIL Rwys 13 and 31	
FAF to MAP 6.1 NM	
Knots	60 90 120 150 180
Min:Sec	6:06 4:04 3:03 2:26 2:02

SE-4, 19 MAR 2026 to 16 APR 2026

SE-4, 19 MAR 2026 to 16 APR 2026