

WAAS CH <b>93513</b> <b>W01A</b>	APP CRS <b>010°</b>	Rwy Idg TDZE Apt Elev	<b>6604</b> <b>87</b> <b>91</b>
--	------------------------	-----------------------------	---------------------------------------


# RNAV (GPS) RWY 1

H L SONNY CALLAHAN (CQF)

**⚠** Baro-VNAV NA when using Mobile Intl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 43°C (109°F). DME/DME RNP-0.3 NA. VDP NA with Mobile Intl altimeter setting. When local altimeter setting not received, use Mobile Intl altimeter setting and increase LPV DA to 329 feet, LNAV/VNAV DA to 517 feet, and all MDA 60 feet; increase LNAV Cats C/D visibility 1/8 SM and Circling Cats C/D 1/4 SM.


**MISSED APPROACH:**  
Climb to 700 then climbing left turn to 2000 direct BFM VORTAC and hold.

AWOS-3PT <b>118.425</b>	MOBILE APP CON ★ <b>118.5 269.3</b>	UNICOM <b>123.0 (CTAF) 0</b>
----------------------------	--	---------------------------------

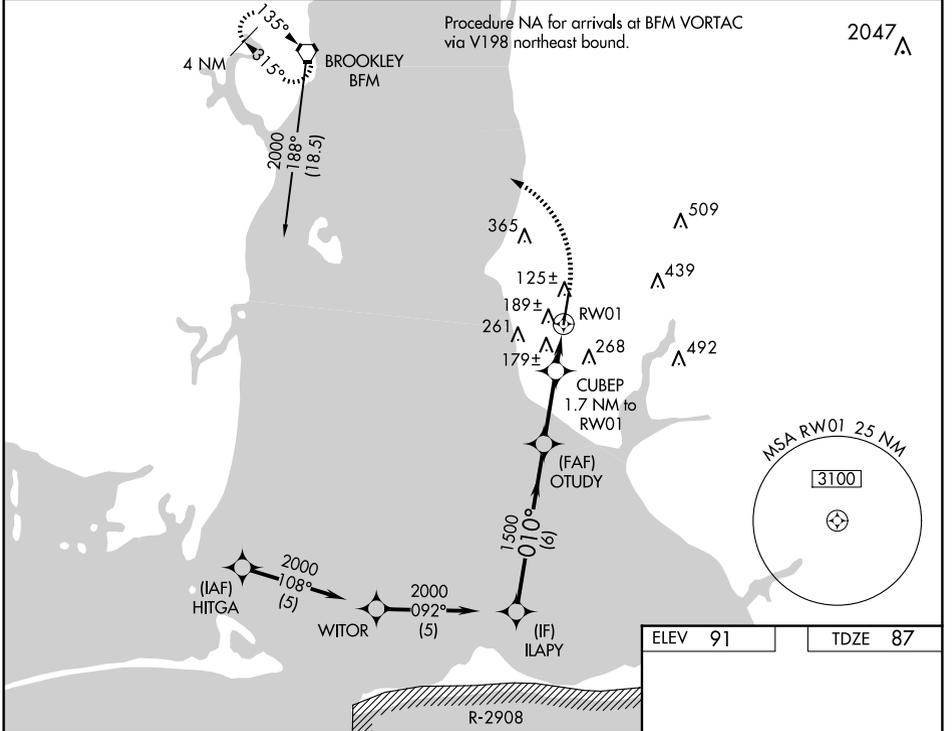

ELEV 91	TDZE 87
---------	---------

Procedure Turn NA <b>2000</b>	ILAPY	OTUDY	CUBEP 1.7 NM to RW01	RW01	BFM	700	2000
						GP 3.00° TCH 35	*660
6 NM		2.6 NM		0.7 NM		1 NM	
CATEGORY	A	B	C	D			
LPV DA	287-3/4		200 (200-3/4)				
LNAV/VNAV DA	475-13/8		388 (400-13/8)				
LNAV MDA	440-1		353 (400-1)				
CIRCLING	560-1 469 (500-1)	580-1 489 (500-1)	720-13/4 629 (700-13/4)	740-2 649 (700-2)			

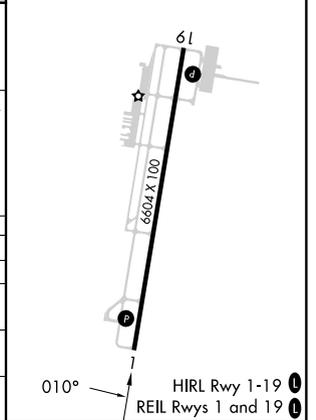

SE-4, 19 MAR 2026 to 16 APR 2026

SE-4, 19 MAR 2026 to 16 APR 2026