

APP CRS	Rwy Ldg	9000
095°	TDZE	1000
	Apt Elev	1026

RNAV (RNP) Z RWY 10

HARTSFIELD/JACKSON ATLANTA INTL (ATL)



▽ For uncompensated Baro-VNAV systems, procedure NA below -8°C (18°F) or above 54°C (130°F). GPS required. Simultaneous approach authorized; arrival from ROBNS NA. For inop ALS, increase RNP 0.11 DA all Cats visibility to RVR 4500.

ALSF-2




MISSED APPROACH: Climb to 1500 then climbing right turn to 3000 direct SCARR and hold.

D-ATIS	ATLANTA APP CON	ATLANTA TOWER					ALL RWYS	GND CON	ALL RWYS
119.65	127.9 379.9	8L-26R	8R-26L	9L-27R	9R-27L	10-28	(8L-26R,8R-26L)	(9L-27R,9R-27L)	10-28
		119.1	125.325	123.85	119.3	119.5	121.9	121.75	121.65
					254.4				254.4

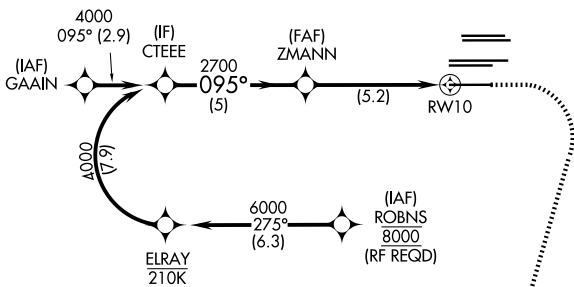



SE-4, 16 APR 2026 to 14 MAY 2026

SE-4, 16 APR 2026 to 14 MAY 2026



ELEV 1026	D	TDZE 1000
-----------	----------	-----------

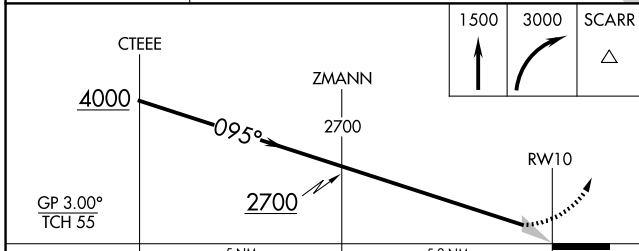

CATEGORY	A	B	C	D
RNP 0.11 DA		1290/24	290 (300-½)	
RNP 0.30 DA		1456/50	456 (500-1)	

AUTHORIZATION REQUIRED

HIRL all Rwys
 TDZL/RCLS Rwys 8L,
 9R, 10, 26R, 27L and 28