

APP CRS	Rwy Ldg	9000
275°	TDZE	998
	Apt Elev	1026

RNAV (RNP) Z RWY 28



HARTSFIELD/JACKSON ATLANTA INTL (ATL)

For uncompensated Baro-VNAV systems, procedure NA below -8°C (18°F) or above 54°C (130°F). GPS required. Simultaneous approach authorized; arrival from RODNN NA. For inop ALS, increase RNP 0.11 DA all Cats visibility to RVR 4000 and RNP 0.30 DA all Cats visibility to RVR 4500.



MISSED APPROACH: Climb to 1500 then climbing left turn to 3000 direct SCARR and hold.


D-ATIS	ATLANTA APP CON	ATLANTA TOWER					ALL RWYS	GND CON	ALL RWYS
119.65	127.9 379.9	8L-26R	8R-26L	9L-27R	9R-27L	10-28	(8L-26R, 8R-26L)	(9L-27R, 9R-27L)	10-28
		119.1	125.325	123.85	119.3	119.5	254.4	121.9	121.75
								121.65	254.4

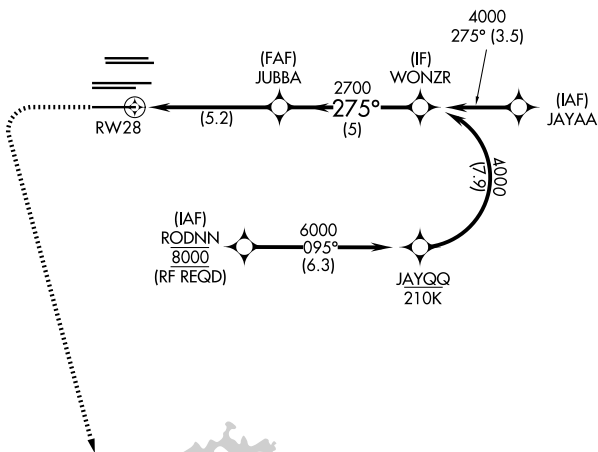

SE-4, 16 APR 2026 to 14 MAY 2026

SE-4, 16 APR 2026 to 14 MAY 2026

ELEV 1026 **D** TDZE 998



HIRL all Rwys
TDZL/RCLS Rwys 8L, 9R, 10, 26R, 27L and 28

1500	3000	SCARR	WONZR
↑	↶	△	
RW28		JUBBA 2700	4000
↘ 275°		↘ 2700	
5.2 NM		5 NM	
GP 3.00°	TCH 57		
CATEGORY	A	B	C
RNP 0.11 DA	1248/24		250 (300-½)
RNP 0.30 DA	1295/24		297 (300-½)

AUTHORIZATION REQUIRED