

| | | |
|--|------------------------|---|
| WAAS CH 49141 W13A | APP CRS 128° | Rwy Idg 3668 TDZE 31 Apt Elev 32 |
|--|------------------------|---|

RNAV (GPS) RWY 13



BEAUMONT MUNI (BMT)

RNP APCH GPS.

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. Circling Rwy 31 NA at night. Rwy 13 helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH: (Do not exceed 230K until SILBE) Climb to 600 then climbing left turn to 2000 direct SILBE and hold.

| | | | |
|----------------------------|---------------------------------------|---------------------------|--|
| AWOS-3PT 118.425 | HOUSTON APP CON 121.3 377.1 | CLNC DEL 121.75 | UNICOM 123.0 (CTAF) 1 |
|----------------------------|---------------------------------------|---------------------------|--|

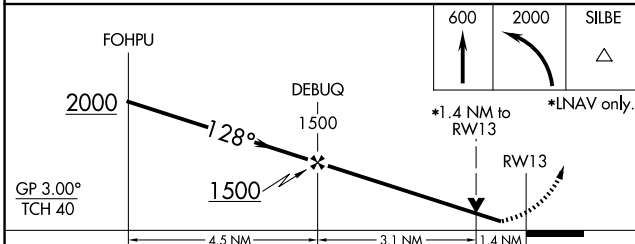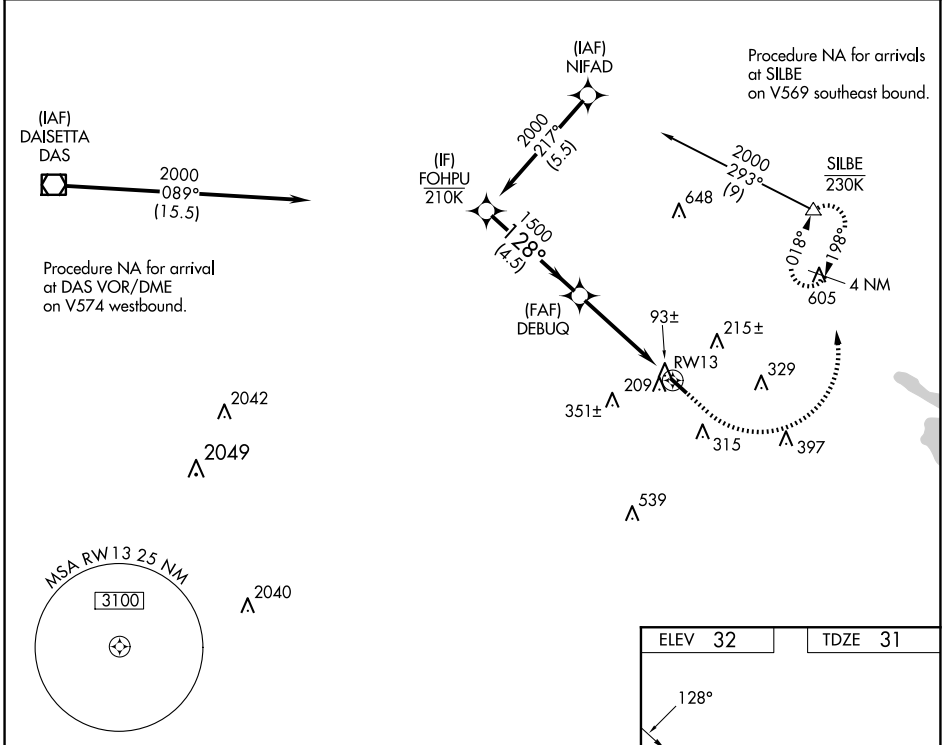

| | |
|---------|---------|
| ELEV 32 | TDZE 31 |
|---------|---------|

REIL Rwy 13

MIRL Rwy 13-31 **1**

| CATEGORY | A | B | C | D |
|--------------|-------------|-------------|-----------------|-----------------|
| LPV DA | | 295-7/8 | 264 (300-7/8) | |
| LNAV/VNAV DA | | 433-1 1/8 | 402 (500-1 1/8) | |
| LNAV MDA | 520-1 | 489 (500-1) | 520-1 3/8 | 489 (500-1 3/8) |
| CIRCLING | 580-1 | 620-1 | 720-2 | 720-2 1/4 |
| | 548 (600-1) | 588 (600-1) | 688 (700-2) | 688 (700-2 1/4) |