ILS or LOC RWY 31R

CHICAGO MIDWAY INTL (MDW)

LOC/DME I-MXT	APP CRS	Rwy Ldg	5826
109.9	318°	TDZE	613
Chan 36		Apt Elev	620

DME and RADAR required.

Rwy 31R helicopter visibility reduction below RVR 4000 NA.

MISSED APPROACH: Climb to 1100 then climbing left turn to 2100 on heading 150° and on EON VORTAC R-001 until crossing IGECY INT/EON 20 DME then climb to 2600 direct EON VORTAC and hold.

D-ATIS	CHICAGO APP CON	MIDWAY TOWER	GND CON	CLNC DEL	CPDLC
132.75	128.2 353.875	135.2 269.125	118.075	124.625	

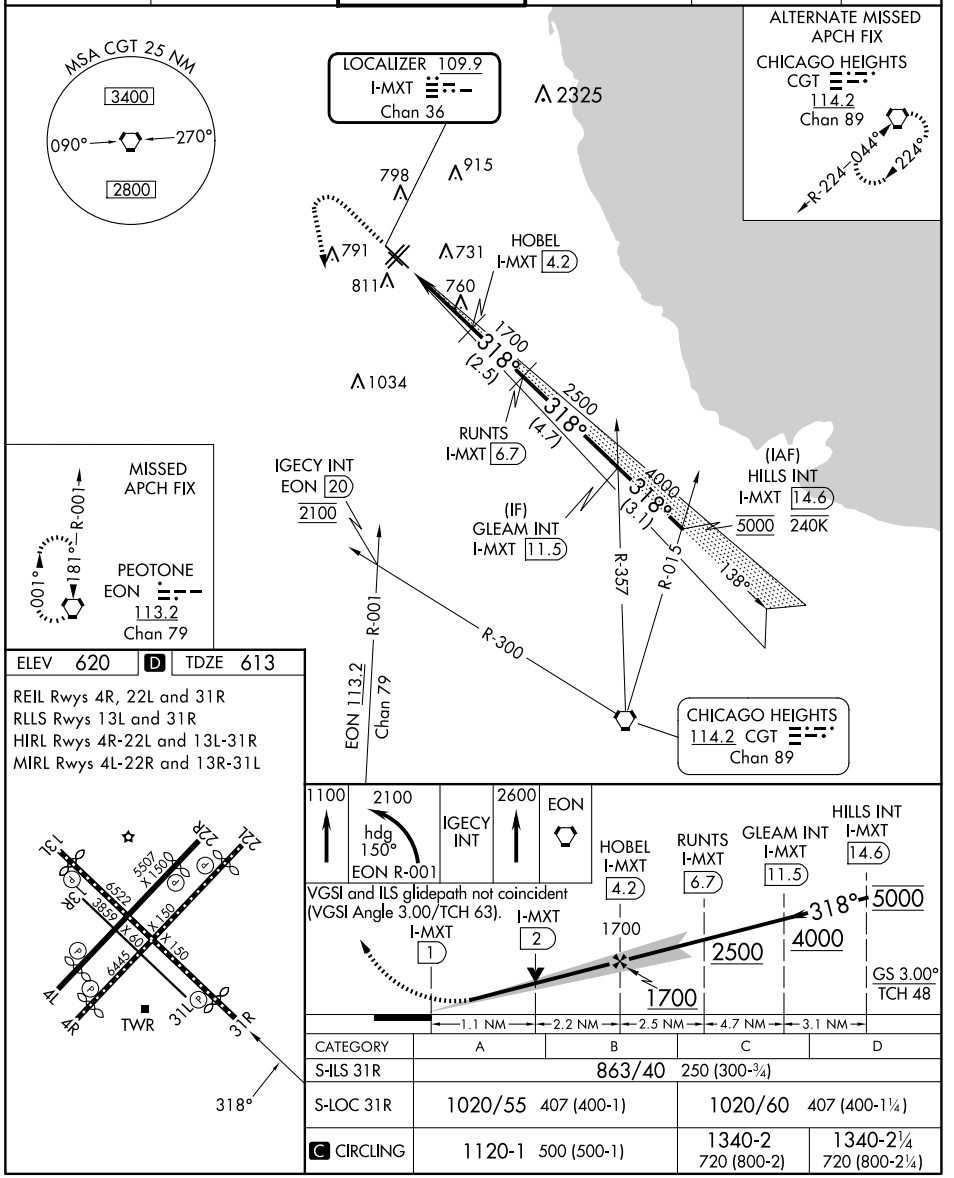

ELEV 620 | D | TDZ 613

REIL Rwys 4R, 22L and 31R
RLLS Rwys 13L and 31R
HIRL Rwys 4R-22L and 13L-31R
MIRL Rwys 4L-22R and 13R-31L

CATEGORY	A	B	C	D
S-ILS 31R	863/40	250 (300-¾)		
S-LOC 31R	1020/55 407 (400-1)		1020/60	407 (400-1¼)
C CIRCLING	1120-1 500 (500-1)		1340-2 720 (800-2)	1340-2¼ 720 (800-2¼)

EC-3, 16 APR 2026 to 14 MAY 2026
EC-3, 16 APR 2026 to 14 MAY 2026