

WAAS CH 86417 W14A	APP CRS 141°	Rwy Ldg TDZE Apt Elev	8001 802 815
--	------------------------	-----------------------------	---


RNAV (GPS) RWY 14

FORT WAYNE INTL (FWA)


ASR For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 47°C (116°F). DME/DME RNP-0.3 NA.

MISSED APPROACH: Climb to 3000 direct CABAC and hold.

ATIS 121.25 360.825	FORT WAYNE APP CON 127.2 284.6	FORT WAYNE TOWER 119.1 269.325	GND CON 121.9 348.6	CLNC DEL 124.75
-------------------------------	--	--	-------------------------------	---------------------------

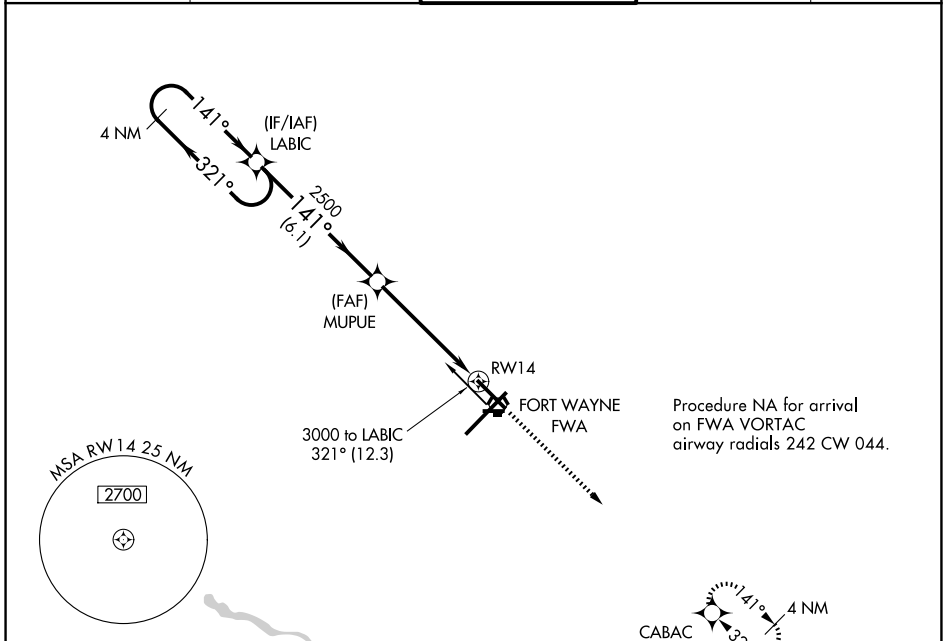

ELEV 815	D	TDZE 802
-----------------	----------	-----------------

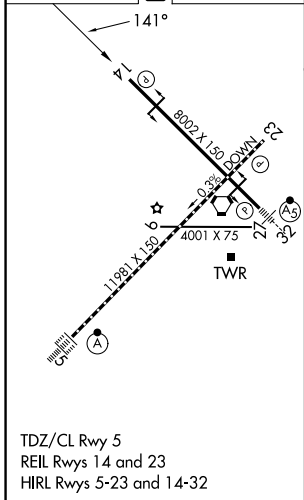

4 NM Holding Pattern		LABIC	MUPUE	3000	CABAC
3000		321°	141°	2500	* 1.5 NM to RWY 14
GP 3.00° TCH 53		2500	2500	2500	* LNAV only
		6.1 NM	3.6 NM	1.5 NM	
CATEGORY	A	B	C	D	
LPV DA		1002-3/4	200 (200-3/4)		
LNAV/VNAV DA		1199-1 1/4	397 (400-1 1/4)		
LNAV MDA	1320-1	518 (600-1)	1320-1 3/8	518 (600-1 3/8)	
CIRCLING	1320-1	505 (600-1)	1420-1 3/4 605 (700-1 3/4)	1520-2 1/4 705 (800-2 1/4)	