

LOC/DME I-GQR 111.75 Chan 54 (Y)	APP CRS 035°	Rwy Ldg 4270 TDZE 744 Apt Elev 757
---	------------------------	--

ILS or LOC RWY 4


KANSAS CITY DOWNTOWN/WHEELER FLD (MKC)

DME or RADAR required for procedure entry. DME or RADAR required for LOC only.

MISSED APPROACH: Climb to 3100 then right turn heading 100° and on ANX VORTAC R-295 to ANX VORTAC and hold.


- ⚠ Circling NA east of Rwy 1-19. Autopilot coupled approach NA below 1013.
- ⚠ Circling NA to Rwy 22. Circling NA for Cat D to Rwy 4. Rwy 4 helicopter visibility reduction below RVR 4000 NA.

ATIS 120.75	KANSAS CITY APP CON 118.4 307.35	DOWNTOWN TOWER 133.3 233.7	GND CON 121.9
-----------------------	--	--------------------------------------	-------------------------

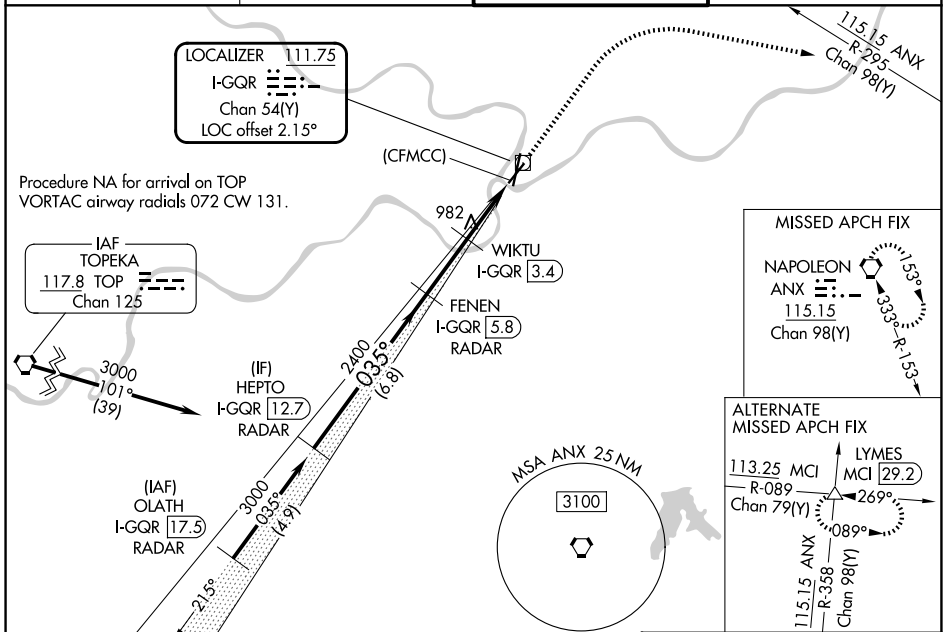

NC-3, 16 APR 2026 to 14 MAY 2026


NC-3, 16 APR 2026 to 14 MAY 2026

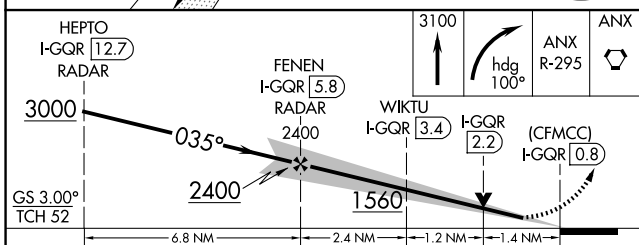

ELEV 757	TDZE 744
----------	----------

HIRL Rwy 4-22 and 1-19
REIL Rwy 1 and 22
RLS Rwy 1

CATEGORY	A	B	C	D
S-ILS 4	1001/40 257 (300-¾)			NA
S-LOC 4	1560/55 816 (900-1)	1560-1¼ 816 (900-1¼)	1560-2½ 816 (900-2½)	NA
CIRCLING	1560-1 803 (900-1)	1560-1¼ 803 (900-1¼)	1560-2½ 803 (900-2½)	
WIKTU FIX MINIMUMS				
S-LOC 4	1240/55	496 (500-1)	1240-1⅜ 496 (500-1⅜)	NA
CIRCLING	1380-1 623 (700-1)	1400-1 643 (700-1)	1460-2 703 (800-2)	1540-2½ 783 (800-2½)

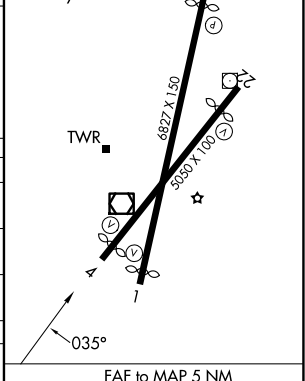

FAF to MAP 5 NM					
Knots	60	90	120	150	180
Min:Sec	5:00	3:20	2:30	2:00	1:40

ILS or LOC RWY 4