# RNAV (GPS) Y RWY 12

MISSOULA MONTANA (MSO)

| WAAS | APP CRS | Rwy Ldg | 9501 |
|---|---|---|---|
| CH 65715 | 117° | TDZE | 3200 |
| W12B | | Apt Elev | 3206 |

RNP APCH.

T A -11°C Circling NA for Cats C and D northeast of Rwy 12-30. Inop table does not apply to LNAV # Cats C/D. Inop table does not apply to LPV† all Cats. **RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR

MISSED APPROACH: (Do not exceed 200K until CINON) Climb to 12000 direct CINON and on track 179° to TUSEE and on track 168° to JENKI and hold, continue climb-in-hold to 12000. ## Missed approach requires minimum climb of 325 feet per NM to 7700.

| ATIS | SPOKANE APP CON ★ | MISSOULA TOWER ★ | GND CON | UNICOM |
|---|---|---|---|---|
| 126.65 | 124.9 298.95 | 118.4 (CTAF) L 377.175 | 121.9 | 122.95 |

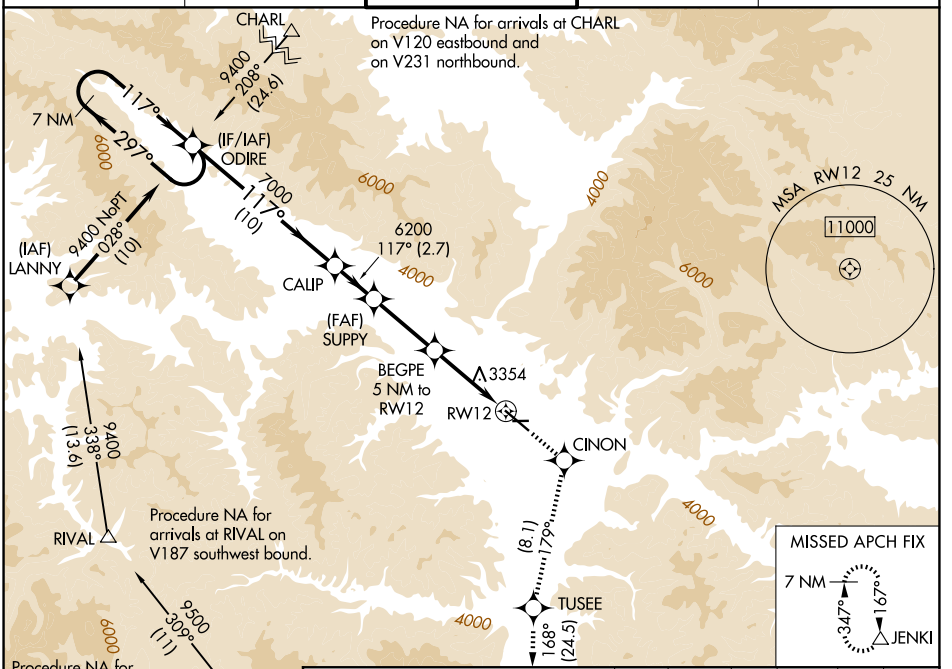


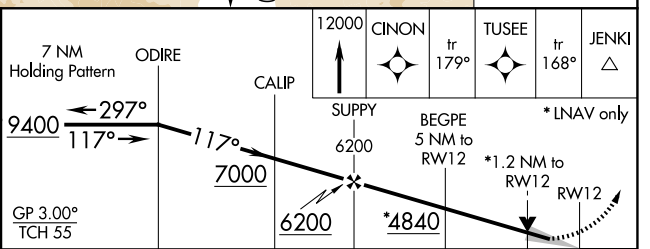


| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| LPV DA ** ## | 3400/24 200 (200-½) | | | |
| LPV DA † | 4229-4 1029 (1100-4) | | | |
| LNAV MDA ## | 3640/24 440 (500-½) | | 3640/40 440 (500-¾) | |
| LNAV MDA # | 4520/40 1320 (1400-¾) | 4520/55 1320 (1400-1) | 4520-3 1320 (1400-3) | |
| CIRCLING | 4520-1¼ 1314 (1400-1¼) | 4700-1½ 1494 (1500-1½) | 4700-3 1494 (1500-3) | 5140-3 1934 (2000-3) |

ELEV 3206 D TDZE 3200




REIL Rwy 30
MIRL Rwy 8-26 L
HIRL Rwy 12-30 L



NW-1, 16 APR 2026 to 14 MAY 2026
NW-1, 16 APR 2026 to 14 MAY 2026