

| | | | |
|----------------------------------------|------------------------|-----------------------------|-------------------------------------------|
| WAAS CH 50233 W31A | APP CRS 314° | Rwy Ldg TDZE Apt Elev | 6200 5096 5096 |
|----------------------------------------|------------------------|-----------------------------|-------------------------------------------|

RNAV (GPS) RWY 31


POWELL MUNI (POY)

RNP APCH.



NA Circling NA to Rws 3, 17, 21 and 35. Baro-VNAV and VDP NA when using Cody altimeter setting. Rwy 31 helicopter visibility reduction below $\frac{3}{4}$ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -25°C or above 48°C. When local altimeter setting not received, use Cody altimeter setting and increase all DA 54 feet and all MDA 60 feet.

MISSED APPROACH: Climb to 9500 direct WODNI and on track 360° to EDDAR and hold.

| | | |
|--------------------------|-----------------------------------------|-------------------------------|
| AWOS-3 119.275 | SALT LAKE CENTER 127.75 351.9 | UNICOM 122.7 (CTAF) |
|--------------------------|-----------------------------------------|-------------------------------|

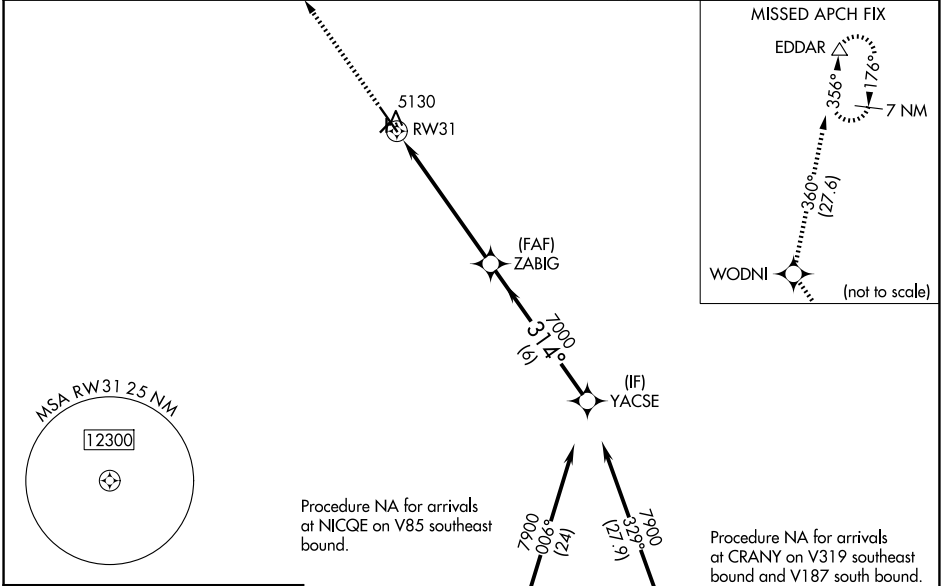

| | |
|-----------|-----------|
| ELEV 5096 | TDZE 5096 |
|-----------|-----------|

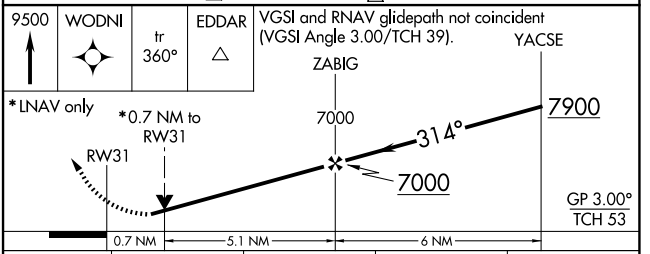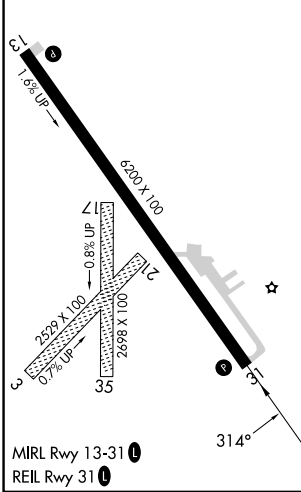

| CATEGORY | A | B | C | D |
|--------------|-----------------------|-----------------------|-------------------------|-----------------------|
| LPV DA | | 5346-1 | 250 (300-1) | |
| LNAV/VNAV DA | | 5346-1 | 250 (300-1) | |
| LNAV MDA | | 5380-1 | 284 (300-1) | |
| CIRCLING | 5500-1 404 (500-1) | 5560-1 464 (500-1) | 5560-1½ 464 (500-1½) | 5660-2 564 (600-2) |

NW-1, 16 APR 2026 to 14 MAY 2026

NW-1, 16 APR 2026 to 14 MAY 2026