


WAAS CH <b>53426</b> <b>W14A</b>	APP CRS <b>143°</b>	Rwy Ldg TDZE Apt Elev	<b>9001</b> <b>1276</b> <b>1297</b>
--	------------------------	-----------------------------	---

# RNAV (GPS) RWY 14

MANSFIELD LAHM RGNL (MFD)

RNP APCH - GPS.		MISSED APPROACH: Climb to 3000 direct PIRCI and hold.		
▽	For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C or above 54°C.			
▲				

ATIS <b>125.3</b>	CLEVELAND APP CON * <b>128.35 360.65</b>	MANSFIELD TOWER * <b>119.8 (CTAF) 291.775</b>	GND CON <b>121.8 291.775</b>	UNICOM <b>122.95</b>
----------------------	---	--	---------------------------------	-------------------------

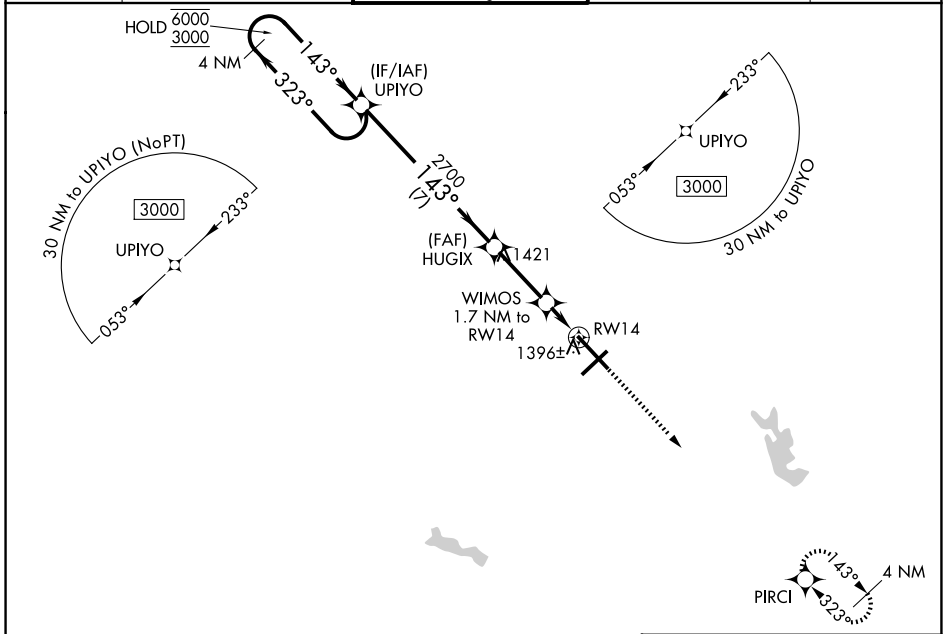

4 NM Holding Pattern UPIYO					3000	PIRCI
6000 ← 323°					↑	✧
3000 → 143°						
GP 3.00°					↑	✧
TCH 42						
7 NM					2700	1820
2.7 NM					1.1 NM to RWY 14	
0.6 NM					1.7 NM to RWY 14	
1.1 NM						
CATEGORY	A	B	C	D		
LPV DA		1476-3/4	200 (200-3/4)			
LNAV/VNAV DA		1565-7/8	289 (300-7/8)			
LNAV MDA		1660-1	384 (400-1)			
CIRCLING	1760-1 463 (500-1)	1820-1 523 (600-1)	2000-2 703 (800-2)	2000-2 1/4 703 (800-2 1/4)		

