

LOC/DME I-BET <u>111.5</u> Chan 52	APP CRS 192°	Rwy Ldg 6400 TDZE 120 Apt Elev 129
--	------------------------	---

ILS Z or LOC Z RWY 19R
BETHEL (BET)(PABE)

DME required.


- T** Circling NA west of Rwy 1L-19R.
A For inop ALS, increase S-LOC Cat C/D visibility to RVR 4500.
RVR 1800 authorized with the use of FD or AP or HUD to DA.

MALSR




MISSED APPROACH: Climb to 700 then climbing right turn to 2000 on BET VORTAC R-277 to ROLLR/BET VORTAC 12 DME and hold.

ATIS 119.8	ANCHORAGE CENTER 125.2 372.0	BETHEL TOWER ★ 118.7 (CTAF) 0	GND CON 121.7
----------------------	--	---	-------------------------

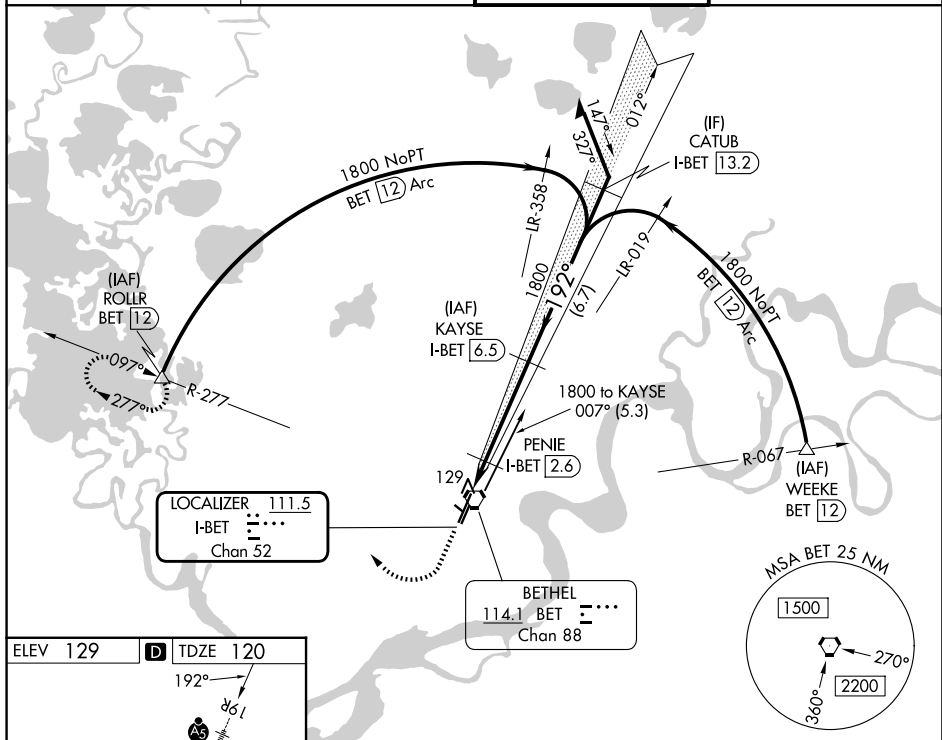

REIL Rwy 1R and 19L

HIRL Rwy 1L-19R, 1R-19L and 12-30

700 ↑	2000 BET R-277	ROLLR △									
*LOC only.	I-BET 1.3	*I-BET 2.1	PENIE I-BET 2.6	KAYSE I-BET 6.5	1800	012°	Remain within 10 NM	1800	192°	1800	GS 3.00° TCH 52
0.8			0.5		3.9 NM						
CATEGORY	A			B		C		D			
S-ILS 19R#	320/24 200 (200-½)										
S-LOC 19R	400/24 280 (300-½)										
CIRCLING	500-1 371 (400-1)			600-1 471 (500-1)		600-1½ 471 (500-1½)		680-2 551 (600-2)			