

HI-ILS or LOC Z RWY 30

| | | |
|---------------------------|-------------------------|---|
| LOC I-MIB 109.9 | APCH CRS 298° | Rwy Ildg 13,198 TDZE 1646 Arpt Elev 1666 |
|---------------------------|-------------------------|---|

[USAF]

MINOT AFB (KMIB)


RADAR or DME required.

- * When ALS inop, increase RVR to 40, vis to 3/4 mile.
- ** When ALS inop, increase RVR to 55, vis to 1 mile.
- *** Circling Not Authorized N of Rwy 12-30.
- **** When ALS inop, increase vis to 1 3/8 miles.



MISSED APPROACH: Climb to 5000 via MIB TACAN R-305 direct AMAXE and hold.


| | | | | |
|------------------------|-------------------------------------|--------------------------------------|-------------------------------|--------------------------|
| ATIS ★ 278.8 | MINOT APP CON 119.6 363.8 | MINOT TOWER ★ 120.65 253.5 | GND CON 134.0 275.8 | CLNC DEL 326.2 |
|------------------------|-------------------------------------|--------------------------------------|-------------------------------|--------------------------|

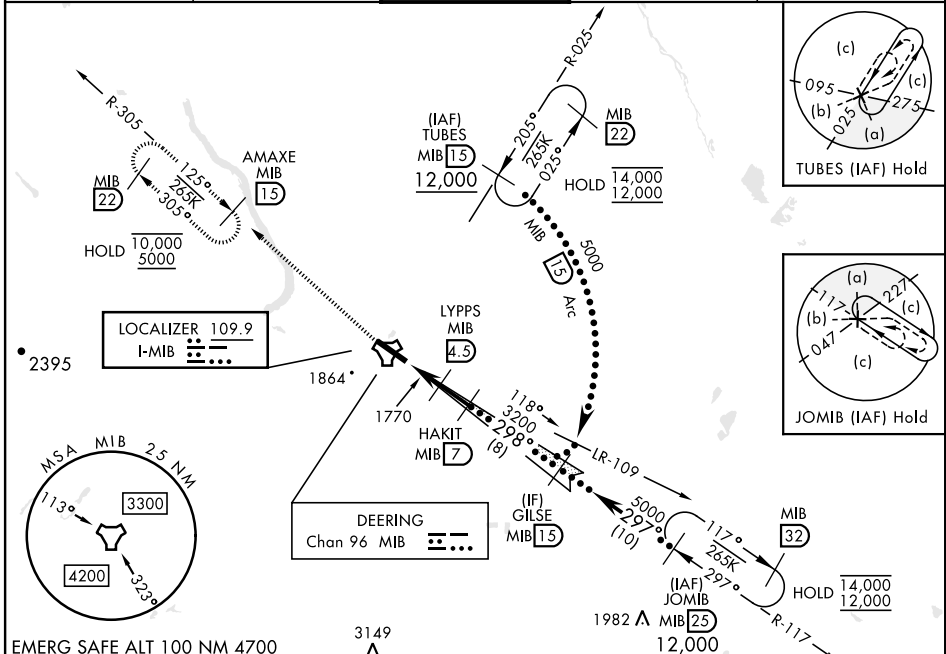

NC-1, 16 APR 2026 to 14 MAY 2026


NC-1, 16 APR 2026 to 14 MAY 2026

EMERG SAFE ALT 100 NM 4700

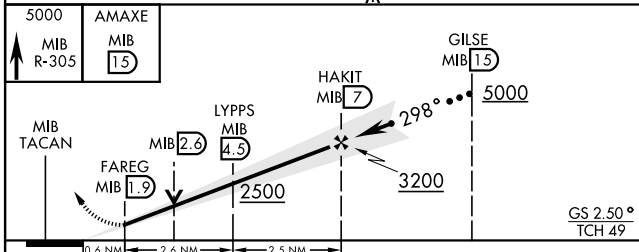

| | | | |
|------|------|------|------|
| ELEV | 1666 | TDZE | 1646 |
|------|------|------|------|

| CATEGORY | C | D | E |
|---|-------------------------------|-----------------------|-------------------------------|
| S-ILS 30* | 1846/24 | 200 | (200-1/2) |
| S-LOC 30** | 2020/35 | 374 | (400-3/8) |
| *** CIRCLING | 2180-1 1/2 514 (600-1 1/2) | 2320-2 654 (700-2) | 2320-2 1/4 654 (700-2 1/4) |
| LOCAL ALTIMETER WITHOUT LAST STEPDOWN FIX | | | |
| S-LOC 30**** | 2140/50 | 494 | (500-1) |
| *** CIRCLING | 2180-1 1/2 514 (600-1 1/2) | 2320-2 654 (700-2) | 2320-2 1/4 654 (700-2 1/4) |



| | | | | | |
|-------------------|------|------|------|------|------|
| HIRL Rwy 12-30 | | | | | |
| FAF to MAP 5.2 NM | | | | | |
| Knots | 120 | 140 | 160 | 180 | 200 |
| Min:Sec | 2:36 | 2:14 | 1:57 | 1:44 | 1:34 |

HI-ILS or LOC Z RWY 30