

WAAS CH <b>53727</b> <b>W08A</b>	APP CRS <b>081°</b>	Rwy Ldg TDZE Apt Elev	<b>5003</b> <b>201</b> <b>201</b>
--	------------------------	-----------------------------	---

# RNAV (GPS) RWY 8


BAXLEY MUNI (BHC)

RNP APCH-GPS.


**NA** Baro-VNAV NA when using Altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. When local altimeter setting not received, use Altimeter setting: increase LPV DA to 513 feet; increase LNAV/VNAV DA to 515 feet; increase all MDAs 40 feet and visibility Cat C 1/2 SM and visibility Cat D 1/4 SM. Helicopter visibility reduction below 1/4 SM NA.

**MISSED APPROACH:** Climb to 1200 then climbing right turn to 2300 direct KIVEC and hold.

AWOS-3PT <b>118.2</b>	JACKSONVILLE CENTER <b>127.575 269.025</b>	UNICOM <b>122.8 (CTAF)</b>
--------------------------	---	-------------------------------

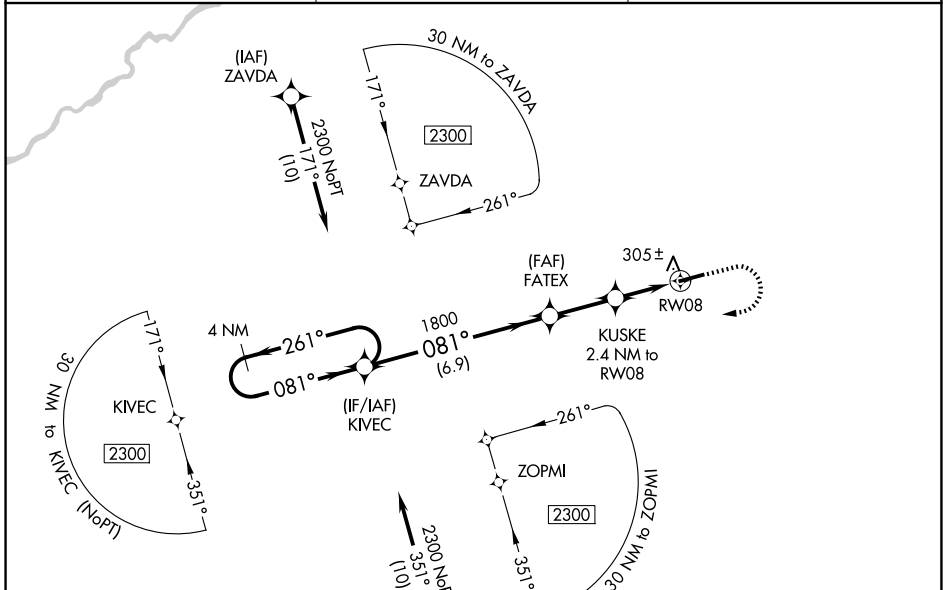

ELEV 201	TDZE 201
----------	----------

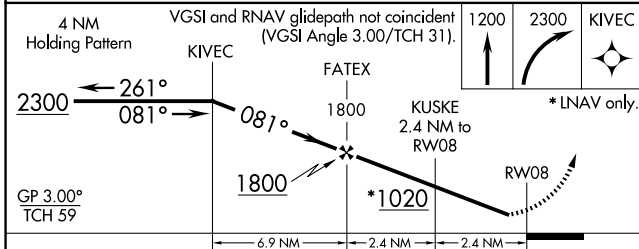

CATEGORY	A	B	C	D
LPV DA		484-1	283 (300-1)	
LNAV/VNAV DA		486-1	285 (300-1)	
LNAV MDA		560-1	359 (400-1)	
CIRCLING	620-1 419 (500-1)	700-1 499 (500-1)	700-1½ 499 (500-1½)	1060-2¾ 859 (900-2¾)

