

|  |                        |  |
|--|------------------------|--|
| LOC/DME I-TDF<br><b>108.7</b><br>Chan 24 | APP CRS<br><b>060°</b> | Rwy Idg<br>TDZE<br>Apt Elev<br><b>5702</b><br><b>604</b><br><b>609</b> |
|--|------------------------|--|

# ILS or LOC RWY 6



RALEIGH RGNL AT PERSON COUNTY (TDF)

**▼** For inop ALS, increase S-LOC 6 visibility Cats C/D to 1½ SM and increase FIPR fix minimums  
**▲ NA** S-LOC 6 visibility Cats C/D to 1 SM.


**MALSR**

**MISSED APPROACH:** Climb to 1500 then climbing left turn to 3000 on heading 021° and on RDU VORTAC R-356 to ALDAN INT/RDU 32.3 DME and hold, continue climb-in-hold to 3000.

|                          |  |                     |                                 |
|--------------------------|--|---------------------|---------------------------------|
| AWOS-3<br><b>126.725</b> | RALEIGH APP CON<br><b>132.35 256.9</b> | GCO<br><b>119.7</b> | UNICOM<br><b>122.7 (CTAF) 0</b> |
|--------------------------|--|---------------------|---------------------------------|

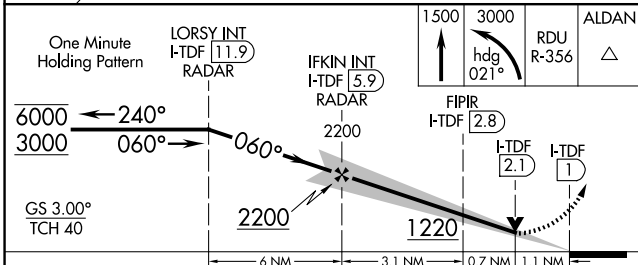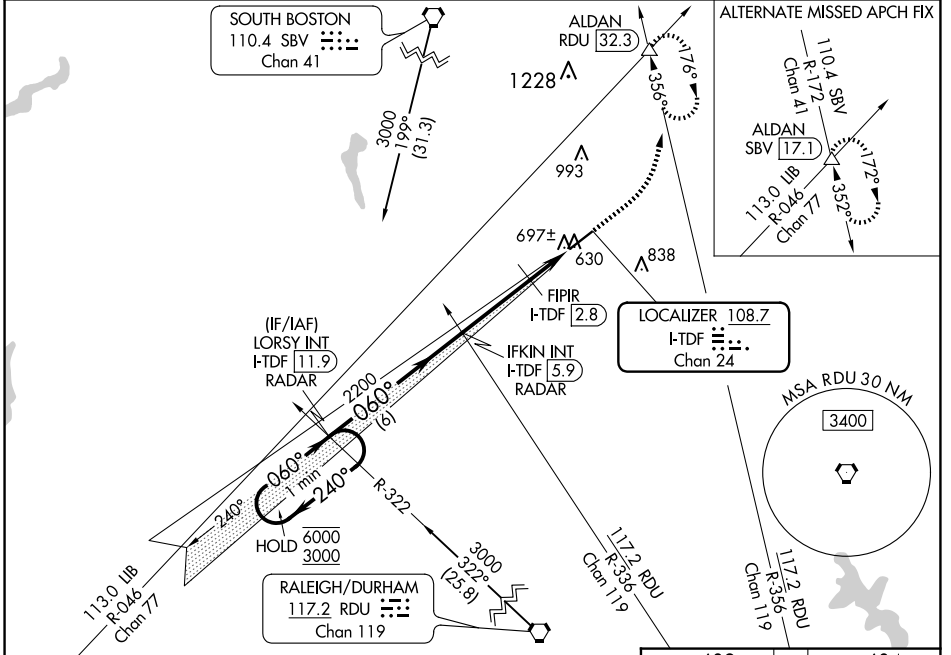

| CATEGORY          | A                 | B           | C                     | D                       |
|-------------------|-------------------|-------------|-----------------------|-------------------------|
| S-ILS 6           | 804-½ 200 (200-½) |             |                       |                         |
| S-LOC 6           | 1220-½            | 616 (700-½) | 1220-1⅜               | 616 (700-1⅜)            |
| CIRCLING          | 1220-1            | 611 (700-1) | 1300-2<br>691 (700-2) | 1300-2¼<br>691 (700-2¼) |
| FIPR FIX MINIMUMS |                   |             |                       |                         |
| S-LOC 6           | 980-½             | 376 (400-½) | 980-⅝                 | 376 (400-⅝)             |
| CIRCLING          | 1080-1            | 471 (500-1) | 1300-2<br>691 (700-2) | 1300-2¼<br>691 (700-2¼) |

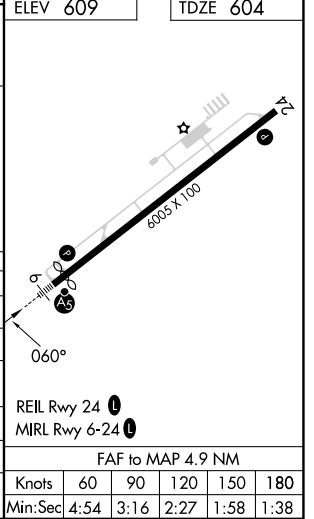

SE-2, 16 APR 2026 to 14 MAY 2026

SE-2, 16 APR 2026 to 14 MAY 2026