

WAAS CH 82047 W31A	APP CRS 311°	Rwy Ldg TDZE Apt Elev	3798 3505 3505
----------------------------------------	------------------------	-----------------------------	-------------------------------------------

RNAV (GPS) RWY 31




EKALAKA (97M)

RNP APCH - GPS.

NA Baro-VNAV NA. Rwy 31 helicopter visibility reduction below 3/4 SM NA. Use BHK altimeter setting; when not received, use BWW altimeter setting and increase LPV DA to 3960 feet and all visibilities 1/4 SM, increase LNAV/VNAV DA to 4460 feet; increase all MDAs 60 feet and LNAV visibility Cat B/C/D 1/2 SM.

MISSED APPROACH: Climb to 7000 direct ELTRO and hold, continue climb-in-hold to 7000.

BHK ASOS 135.475	SALT LAKE CENTER 126.85 305.2	CTAF 122.9
----------------------------	-----------------------------------------	----------------------

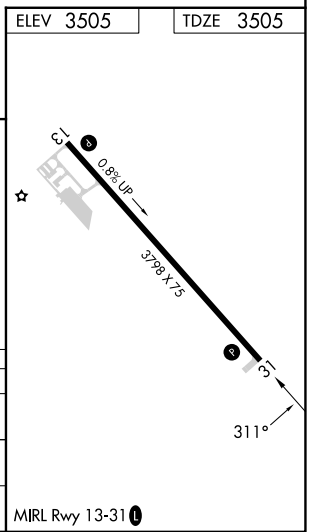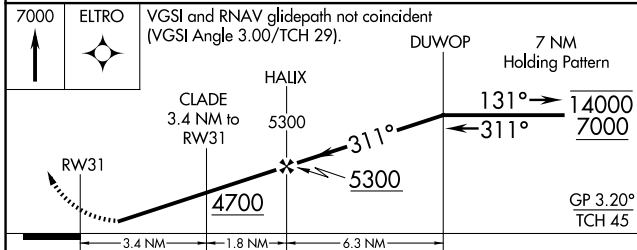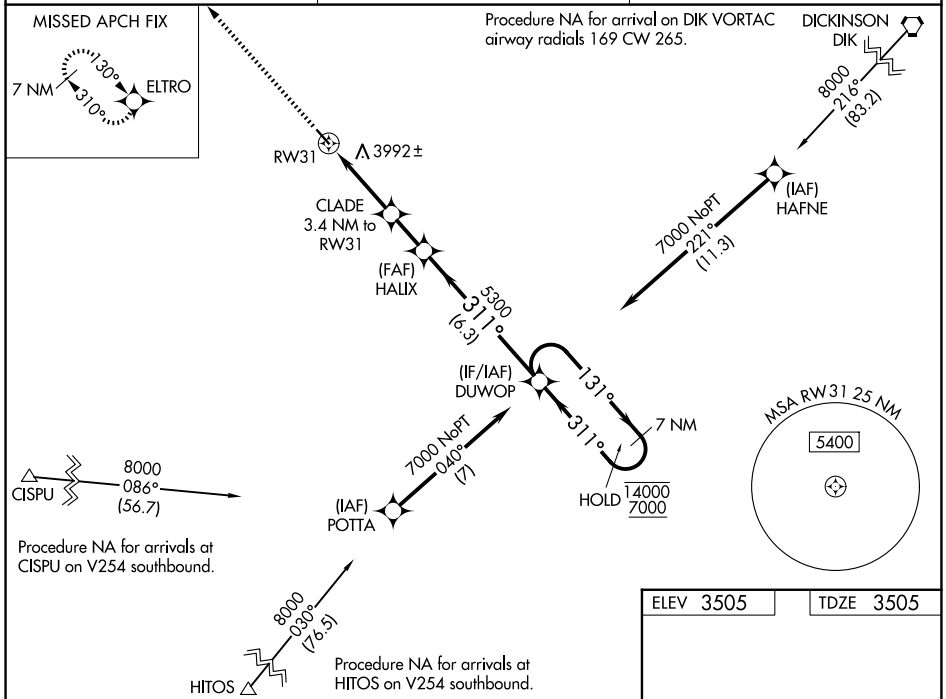

CATEGORY	A	B	C	D
LPV DA		3900-1 1/8	395 (400-1 1/8)	
LNAV/VNAV DA		4400-2 1/2	895 (900-2 1/2)	
LNAV MDA	4400-1 1/4 895 (900-1 1/4)	4400-1 1/2 895 (900-1 1/2)	4400-3	895 (900-3)

NW-1, 16 APR 2026 to 14 MAY 2026

NW-1, 16 APR 2026 to 14 MAY 2026