

WAAS CH 62840 W17A	APP CRS 171°	Rwy Ldg TDZE Apt Elev	5943 693 693
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 17

KENNETH COPELAND (4T2)


RNP APCH.

NA Baro-VNAV and VDP NA when using Fort Worth Meacham Intl altimeter setting. Rwy 17 helicopter visibility reduction below $\frac{3}{4}$ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C . Obtain local altimeter setting on CTAF; when not received, use Fort Worth Meacham Intl altimeter setting; Increase LPV DA to 973 feet; increase LNAV/VNAV DA to 1135 feet; increase all MDA 40 feet and LNAV Cat C/D and Circling Cat C visibility $\frac{1}{4}$ SM.

MISSED APPROACH: Climb to 1200 then climbing right turn to 3100 direct ODGOY and hold.

LONE STAR APP CON
125.8 257.95

UNICOM
123.075 (CTAF)

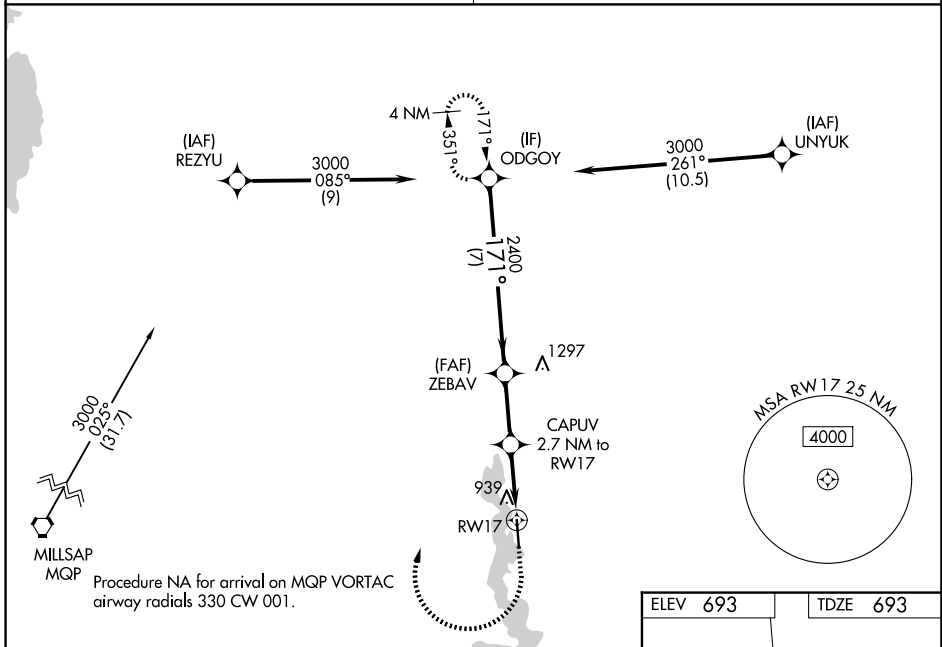

SC-2, 16 APR 2026 to 14 MAY 2026

SC-2, 16 APR 2026 to 14 MAY 2026

	ODGOY	ZEBAV	CAPUV	RWY 17
	3000	2400	2400	939
	171°		171°	
	7 NM	2.6 NM	1.2 NM	1.5 NM
GP 3.00° TCH 40				
CATEGORY	A	B	C	D
LPV DA	943-1 250 (300-1)			
LNAV/VNAV DA	1105-1 $\frac{3}{8}$ 412 (500-1 $\frac{3}{8}$)			
LNAV MDA	1200-1 507 (600-1)	1200-1 $\frac{3}{8}$ 507 (600-1 $\frac{3}{8}$)		
CIRCLING	1240-1 547 (600-1)	1340-1 $\frac{3}{4}$ 647 (700-1 $\frac{3}{4}$)	1440-2 $\frac{1}{2}$ 747 (800-2 $\frac{1}{2}$)	

