

|             |          |             |
|-------------|----------|-------------|
| APP CRS     | Rwy Idg  | <b>5494</b> |
| <b>175°</b> | TDZE     | <b>202</b>  |
|             | Apt Elev | <b>202</b>  |





# RNAV (GPS) RWY 18

BEAUREGARD RGNL (DRI)

**⚠** DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. When local altimeter setting not received, use Fort Polk altimeter setting and increase all MDAs 60 feet and visibility LNAV Cats C/D and Circling Cats C/D ¼ SM.

MISSED APPROACH: Climb to 1700 direct CONON and hold.

|                            |                                    |                               |
|----------------------------|------------------------------------|-------------------------------|
| AWOS-3PT<br><b>118.225</b> | POLK APP CON<br><b>123.7 261.3</b> | UNICOM<br><b>122.8 (CTAF)</b> |
|----------------------------|------------------------------------|-------------------------------|

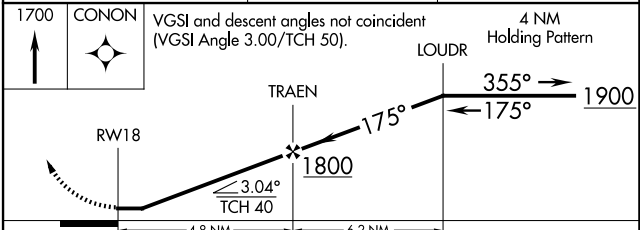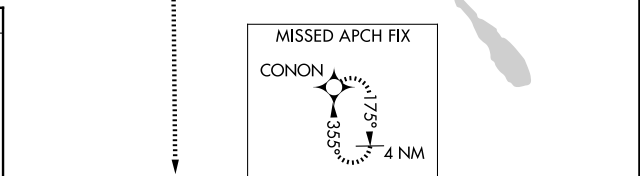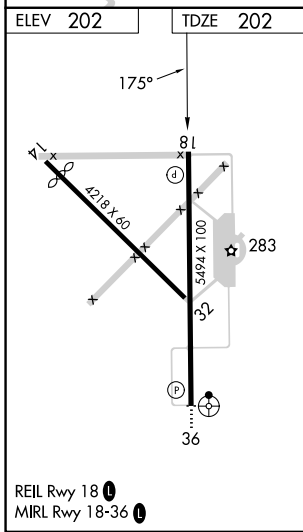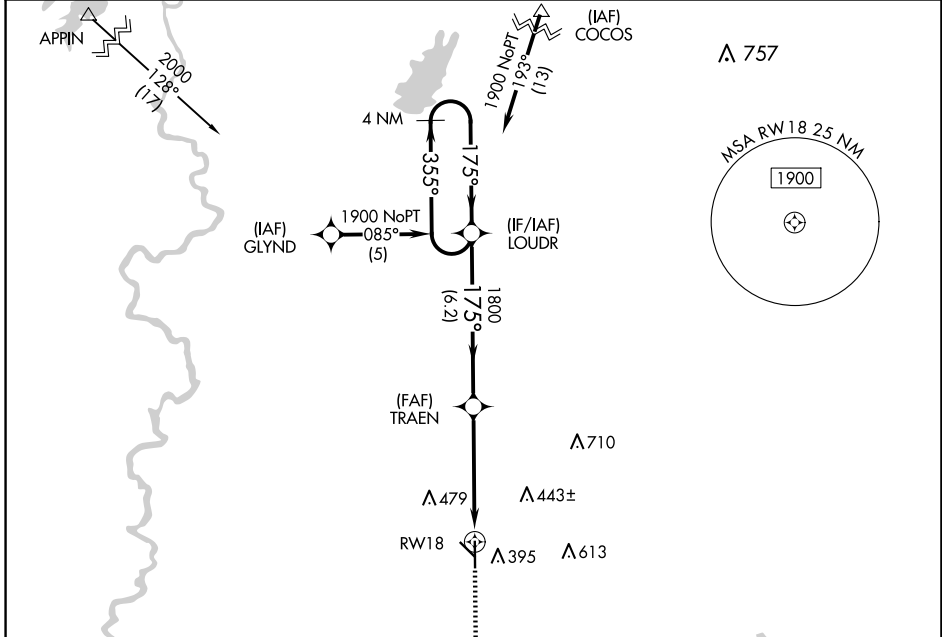

| CATEGORY | A     | B           | C                      | D                       |
|----------|-------|-------------|------------------------|-------------------------|
| LNAV MDA | 680-1 | 478 (500-1) | 680-1¼<br>478 (500-1¼) | 680-1½<br>478 (500-1½)  |
| CIRCLING | 720-1 | 518 (600-1) | 780-1½<br>578 (600-1½) | 1000-2½<br>798 (800-2½) |

SC-4, 14 MAY 2026 to 11 JUN 2026

SC-4, 14 MAY 2026 to 11 JUN 2026