ILS or LOC RWY 23L

INDIANAPOLIS INTL (IND)

LOC/DME I-FVJ	APP CRS	Rwy Ldg 10000
111.15	230°	TDZE 790
Chan 48 (Y)		Apt Elev 796

Simultaneous approach authorized.
* RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR

MISSED APPROACH: Climb to 1500 then climbing left turn to 3000 on heading 100° and on VHP VORTAC R-136 to OZMOE INT/VHP 20.1 DME and hold.

D-ATIS	INDIANAPOLIS APP CON	INDY TOWER	GND CON	CLNC DEL	CPDLC
134.25	128.175 317.8	120.9 251.1	121.9	128.75 251.1	

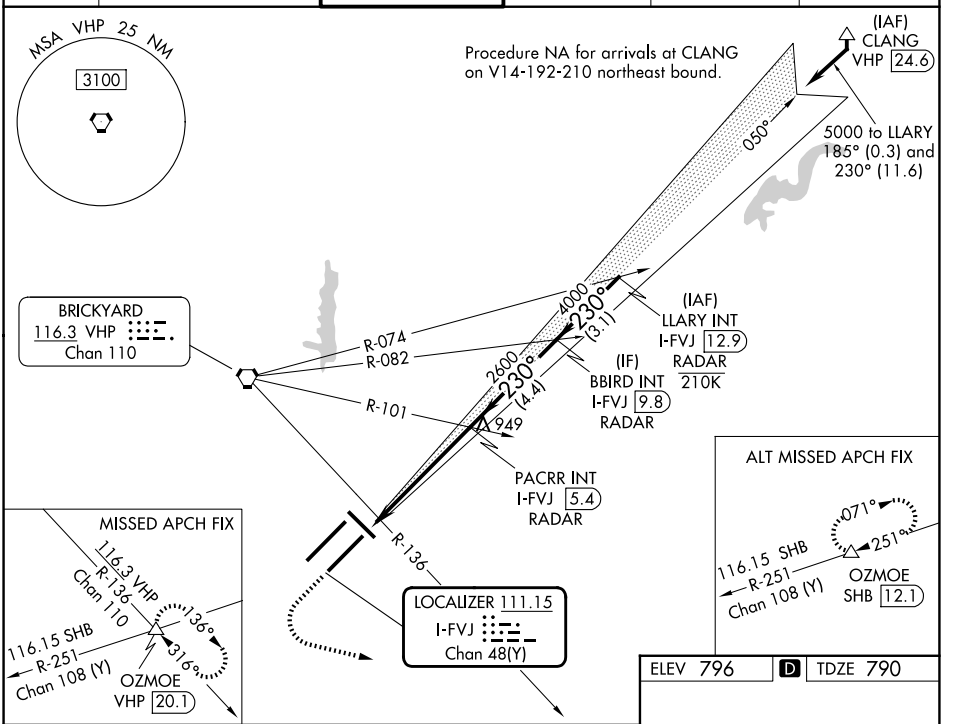

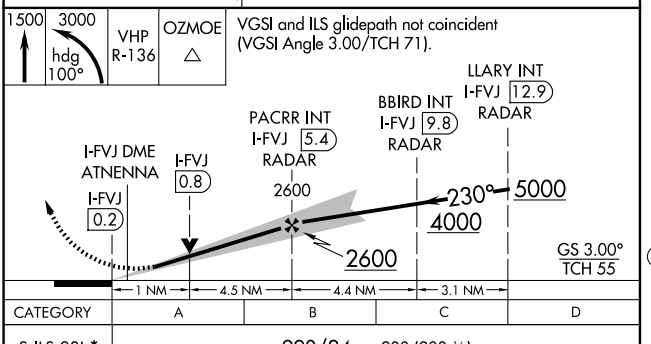

CATEGORY	A	B	C	D
S-ILS 23L*	990/24	200 (200-½)		
S-LOC 23L	1180/24	390 (400-½)	1180/35	390 (400-⅝)
CIRCLING	1420-1	624 (700-1)	1420-1¾	1560-2½
			624 (700-1¾)	764 (800-2½)

ELEV 796 D TDZE 790



HIRL all Rwys
TDZ/CL Rwys 5L and 5R

FAF to MAP 5.5 NM

Knots	60	90	120	150	180
Min:Sec	5:30	3:40	2:45	2:12	1:50

EC-2, 14 MAY 2026 to 11 JUN 2026
EC-2, 14 MAY 2026 to 11 JUN 2026