

# MERLOT FOUR DEPARTURE

AL-281 (FAA)


RADAR required.

**TOP ALTITUDE:  
ASSIGNED BY ATC**


OAKLAND CENTER  
127.8 353.5  
ATIS  
124.05  
CLNC DEL  
127.85  
GND CON  
121.7  
NAPA TOWER\*  
118.7 (CTAF) 257.8

### TAKEOFF MINIMUMS

Rwy 1L: Standard with minimum climb of 420'/NM to 2900.  
Rwy 1R: Standard with minimum climb of 460'/NM to 3000.  
Rwy 6: Standard with minimum climb of 430'/NM to 1600.  
Rwy 19L: Standard with minimum climb of 320'/NM to 1500.  
Rwy 19R: Standard with minimum climb of 330'/NM to 1600.  
Rwy 24: Standard with minimum climb of 255'/NM to 1300.



SCAGGS ISLAND  
112.1 SGD  
Chan 58

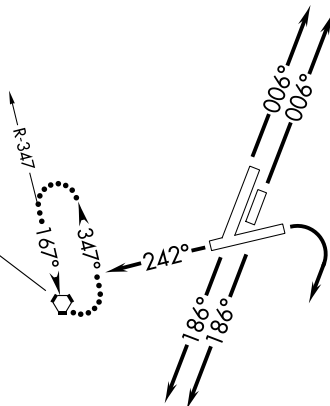

NOTE: Chart not to scale.

### DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAYS 1L/R: Climb heading 006° (or climbing left turn on ATC assigned heading 186° CW 006°); thence. . . .

TAKEOFF RUNWAY 6: Climbing right turn on assigned heading between 130° CW 242°; thence. . . .

TAKEOFF RUNWAYS 19L/R: Climb heading 186° (or ATC assigned heading 130° CW 270°); thence. . . .

TAKEOFF RUNWAY 24: Climb heading 242° (or ATC assigned heading 130° CW 270°); thence. . . .

. . . . expect vectors to join assigned route. Maintain ATC assigned altitude; expect filed altitude/flight level ten minutes after departure.

### LOST COMMUNICATIONS

If not in contact with Oakland Center after reaching 4000, proceed to the SGD VORTAC and hold.