LOC/DME I-SLC	APP CRS	Rwy Ldg 12002
109.5	344°	TDZE 4225
Chan 32		Apt Elev 4231

ILS RWY 34R (CAT II & III)

SALT LAKE CITY INTL (SLC)

RNP APCH-GPS. From QWENN or JAZZZ.

DME required for LOC only. DME or RADAR required.

Simultaneous approach authorized. CAT II: RVR 1000 authorized with specific OPSPEC, MSPEC, or LOA approval and use of autoland or HUD to touchdown.

ALSF-2

MISSED APPROACH: Climb to 9000 direct TCH VORTAC and on TCH VORTAC R-331 to OGD VORTAC and hold.

D-ATIS	SALT LAKE CITY APP CON	SALT LAKE CITY TOWER	GND CON
124.75 125.625	125.7 284.6	119.05 257.8	123.775 348.6

MISSED APCH FIX

OGDEN OGD 115.7 Chan 104

R-281 101° 281°

LOCALIZER 109.5 I-SLC Chan 32

R-331

WASATCH 116.8 TCH Chan 115

MSA TCH 2.5 NM

140° 10900

230° 8700

050° 12700

4349

CHEVL I-SLC 5.5 RADAR

6100 (9.1) 344°

HAKKR I-SLC 14.7 RADAR

(3.1)

(IF) ALGIE I-SLC 17.8 RADAR

9000 344° 10000 210K 344° (2.4)

R-6412 C & D

R-6412 A & B

PLAGE I-SLC 20.2 RADAR 210K

11000 001° (7.1)

(IAF) QWENN 11000 230K

11000 325° (6.1) 164°

(IAF) JAZZZ 12000 230K

11000 to PLAGE 346° (9.7)

IAF FAIRFIELD 116.6 FFU Chan 113

5000 7000 9000

Procedure NA for arrival on FFU VORTAC airway radials 310 CW 030.

ELEV 4231 D TDZE 4225

TWR

16R 12000 X 150

16L 12002 X 150

17 4893 X 150

7 9559 X 150

34L 34R 32 35

HIRL all Rwys
TDZL/RCLS Rwys 16L, 16R, 17, 34L, 34R and 35

9000 TCH TCH R-331 OGD

VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 73).

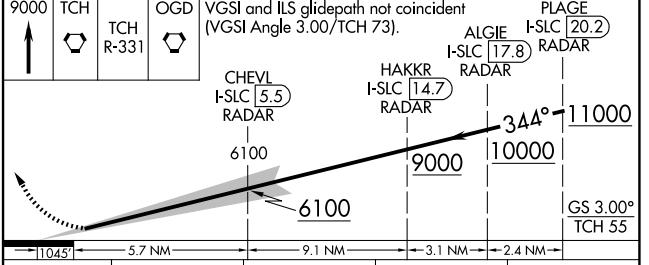

CATEGORY	A	B	C	D
S-ILS 34R	CAT II RA 99/12 100 DA 4325			
S-ILS 34R	CAT III RVR 03			

CATEGORY II & III ILS - SPECIAL AIRCREW & AIRCRAFT CERTIFICATION REQUIRED

SW-4, 14 MAY 2026 to 11 JUN 2026