


VORTAC SPI 112.7 Chan 74	APP CRS 055°	Rwy Ldg TDZE Apt Elev	7927 592 598
--	------------------------	-----------------------------	---

VOR RWY 4

ABRAHAM LINCOLN CAPITAL (SPI)


DME required.	MALSR	MISSED APPROACH: Climb to 1500 then climbing left turn to 2500 on heading 325° and on SPI VORTAC R-355 to GROWL/14.7 DME and hold.
<p>▼ VDP NA when using AAA altimeter setting. When local altimeter setting not received, use AAA altimeter setting; increase all MDAs 60 feet and Circling Cat C/D visibility ¼ SM. For inop ALS, increase S-4 Cat C/D visibility to RVR 5500.</p> <p>▲ ASR</p>		

ATIS 127.65 270.1	SAINT LOUIS APP CON 126.15 323.0	SPRINGFIELD TOWER ★ 121.3 (CTAF) 0 257.8	GND CON 121.9 348.6	UNICOM 122.95
-----------------------------	--	--	-------------------------------	-------------------------

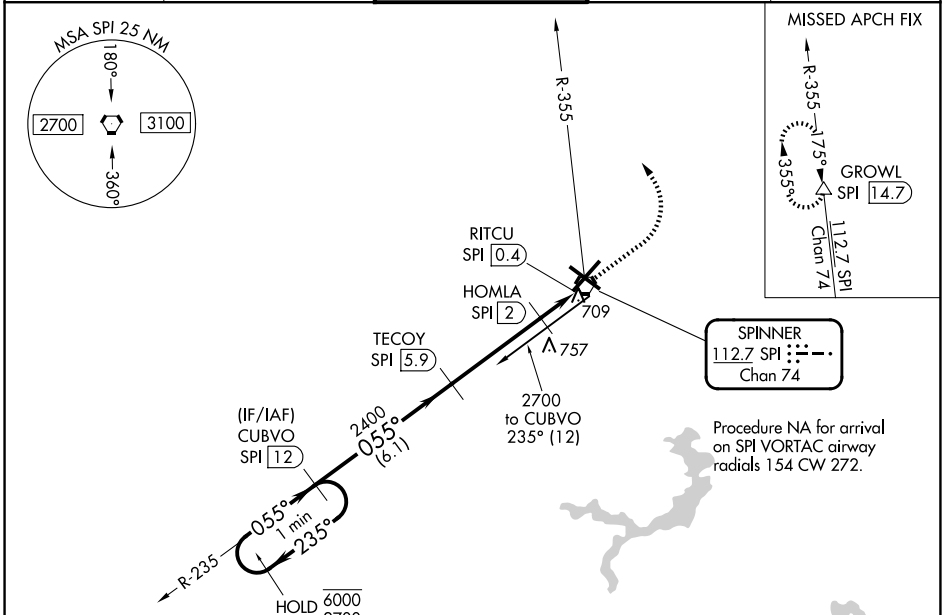

SPINNER
112.7 SPI
Chan 74

Procedure NA for arrival on SPI VORTAC airway radials 154 CW 272.

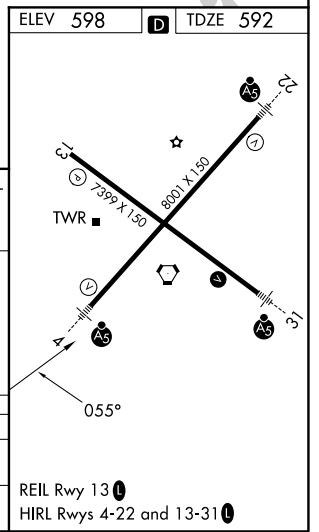

One Minute Holding Pattern	CUBVO SPI [12]	TECOY SPI [5.9]	1500	2500	SPI R-355	GROWL
6000 ← 235°	2700 → 055°	2400	hdg 325°	HOMLA SPI [2]	SPI [1.4]	RITCU SPI [0.4]
	6.1 NM	4 NM	3.00 TCH 56	1140		
CATEGORY	A	B	C	D		
S-4	960/24	368 (400-½)	960/40	368 (400-¾)		
CIRCLING	1040-1 442 (500-1)	1100-1 502 (600-1)	1360-2¼ 762 (800-2¼)	1380-2½ 782 (800-2½)		

REIL Rwy 13
HIRL Rws 4-22 and 13-31

EC-3, 14 MAY 2026 to 11 JUN 2026

EC-3, 14 MAY 2026 to 11 JUN 2026