RNAV (RNP) Z RWY 28R

PITTSBURGH INTL (PIT)

APP CRS	Rwy Ldg	10102
281°	TDZE	1174
	Apt Elev	1203

RNP AR APCH - GPS.

MALSR

MISSED APPROACH: Climb to 4000 on track 281° to KANVE and track 341° to USUSE and track 060° to EWC VOR/DME and hold.

Simultaneous approach authorized. For uncompensated Baro-VNAV systems, procedure NA below -18°C or above 54°C. For inop ALS, increase RNP 0.30 all Cats visibility to 1⅜ SM.

D-ATIS	PITTSBURGH APP CON	PITTSBURGH TOWER	GND CON
127.25	123.95 360.8	128.3 291.7	SOUTH 121.9 348.6 NORTH 127.8 348.6

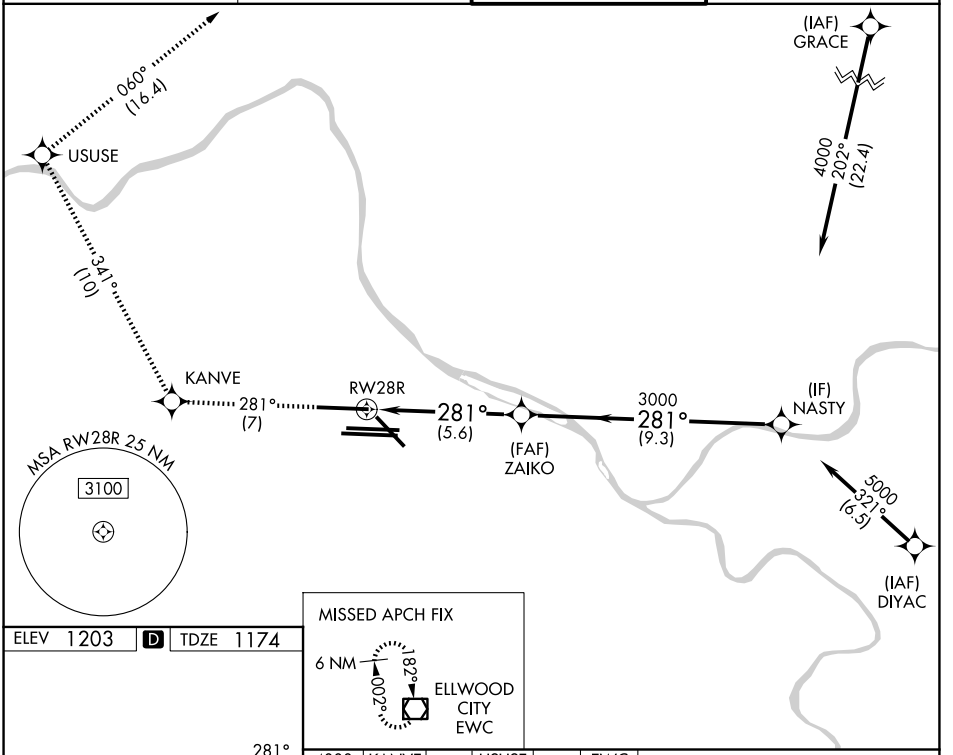

ELEV 1203 D TDZE 1174

MISSED APCH FIX

6 NM 182° 200° ELLWOOD CITY EWC



4000	KANVE	tr 341°	USUSE	tr 060°	EWC
tr 281°					

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 71).

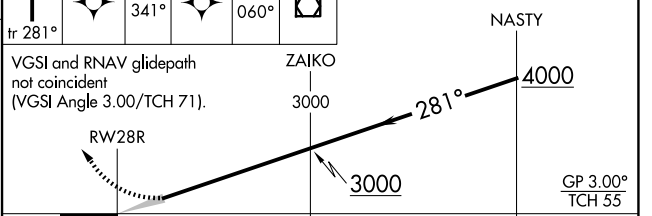

CATEGORY	A	B	C	D
RNP 0.30 DA	1675/55 501 (500-1)			

REIL Rwy 10C
HIRL all rwys
TDZL/RCLS Rwys 10L, 10R, 28L, 28R, 28C, and 32

AUTHORIZATION REQUIRED

NE-4, 14 MAY 2026 to 11 JUN 2026