| WAAS | APP CRS | Rwy Ldg | 10200 |
|---|---|---|---|
| CH 90407 | 258° | TDZE | 926 |
| W26B | | Apt Elev | 944 |

# RNAV (GPS) Y RWY 26L

ONTARIO INTL (ONT)

RNP APCH - GPS.

T Circling NA north of Rwy 8L-26R. For uncompensated Baro-VNAV systems, procedure NA below 2°C or above 54°C. For inop ALS, increase all Cats LNAV/VNAV visibility to RVR 5500.

ALSF-2

MISSED APPROACH: Climb to 4700 direct HERZO and on track 170° to MAHOY and on track 083° to PDZ VORTAC, continue climb in hold to 4700.

| D-ATIS | SOCAL APP CON | ONTARIO TOWER | GND CON |
|---|---|---|---|
| 124.25 | 127.0 318.2 | 120.6 360.775 | 121.9 257.8 |

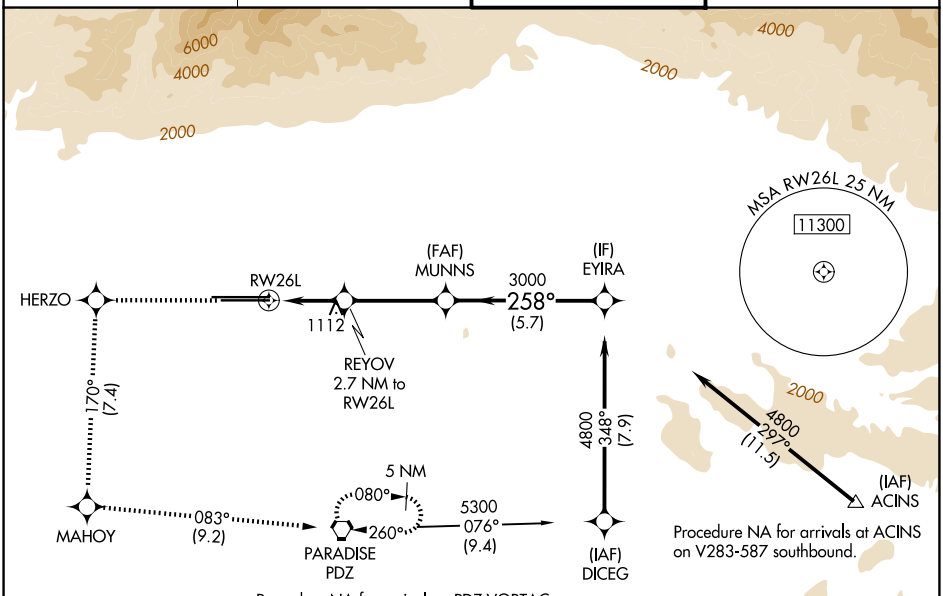


ELEV 944 D TDZE 926




TDZL/RCLS Rwys 8L, 26L and 26R
HIRL Rwys 8L-26R and 8R-26L

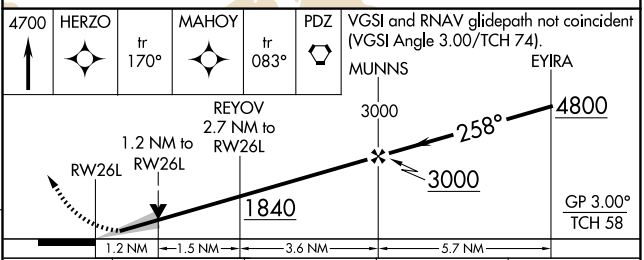


| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| LPV DA | 1126/18 200 (200-½) | | | |
| LNAV/VNAV DA | 1267/30 341 (400-⅝) | | | |
| LNAV MDA | 1380/24 454 (500-½) | | 1380/45 454 (500-⅞) | |
| CIRCLING | 1400-1 456 (500-1) | | 1500-1½ 556 (600-1½) | 1540-2 596 (600-2) |




SW-3, 14 MAY 2026 to 11 JUN 2026