


| | | |
|--|------------------------|---|
| VOR/DME MFE 117.2 Chan 119 | APP CRS 134° | Rwy Ldg 6983 TDZE 107 Apt Elev 107 |
|--|------------------------|---|

VOR RWY 14



MC ALLEN INTL (MFE)

⚠ Circling NA northeast of Rwy 14-32. ADF or DME required. For nop MALSR, increase S-14 Cat C/D visibility to 1 1/8 mile. When local altimeter setting not received, use Weslaco altimeter setting and increase all MDA 40 feet and S-14 Cat C/D and Circling Cat C visibility 1/8 mile. VDP NA when using Weslaco altimeter setting.

MALSR 

MISSED APPROACH: Climb to 1000 then climbing left turn to 2000 direct MFE VOR/DME and hold.

| | | | | |
|----------------------|---------------------------------------|--|-------------------------|-------------------------|
| ATIS 128.5 | VALLEY APP CON 126.55 377.2 | MC ALLEN TOWER ★ 118.5 (CTAF) 0 256.9 | GND CON 121.8 | UNICOM 122.95 |
|----------------------|---------------------------------------|--|-------------------------|-------------------------|

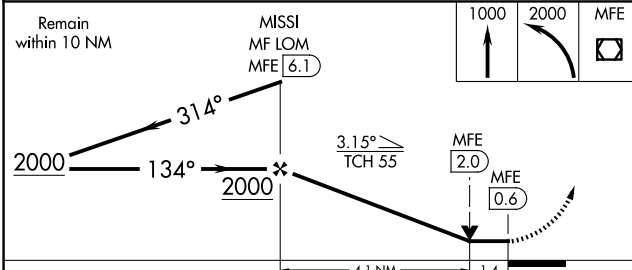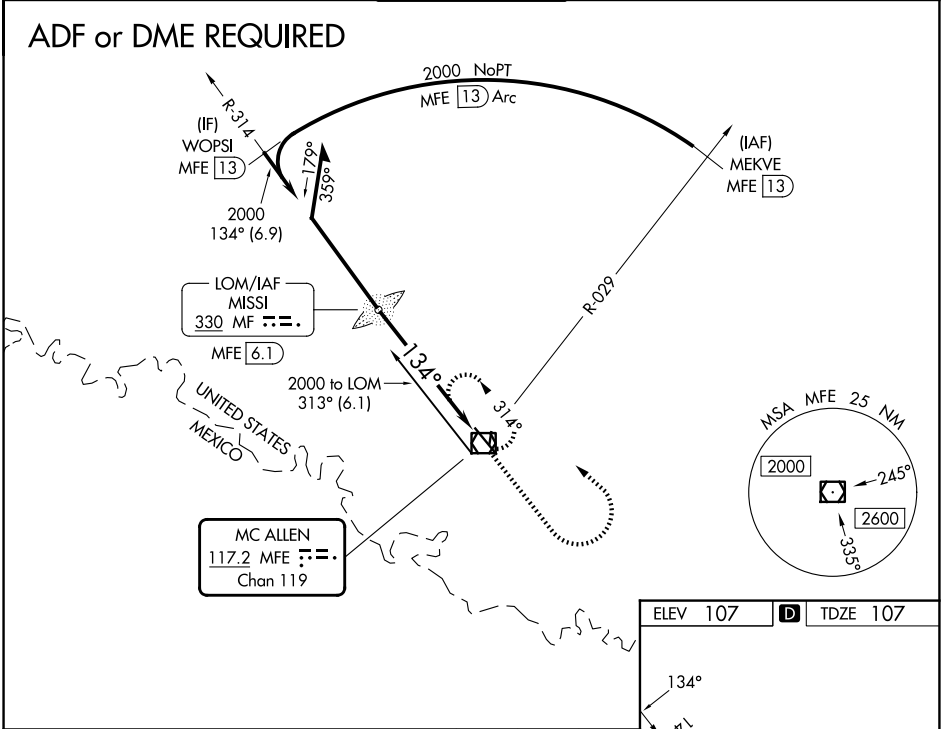

| | | |
|----------|----------|----------|
| ELEV 107 | D | TDZE 107 |
|----------|----------|----------|

| | | | | | |
|---------|------|------|------|------|------|
| Knots | 60 | 90 | 120 | 150 | 180 |
| Min:Sec | 5:30 | 3:40 | 2:45 | 2:12 | 1:50 |

| CATEGORY | A | B | C | D |
|----------|-----------------------|---|-------------------------|---------------------------|
| S-14 | 620-1/2 513 (600-1/2) | | 620-1 513 (600-1) | |
| CIRCLING | 620-1 513 (600-1) | | 620-1 1/2 513 (600-1/2) | 800-2 1/4 693 (700-2 1/4) |

SC-3, 14 MAY 2026 to 11 JUN 2026

SC-3, 14 MAY 2026 to 11 JUN 2026