

| | | | |
|--|------------------------|--|-------------------------|
| WAAS CH 53714 W16A | APP CRS 159° | Rwy Ldg TDZE 3900 2160 | Apt Elev 2160 |
|--|------------------------|--|-------------------------|


RNAV (GPS) RWY 16

PIONEER VILLAGE FLD (ØV3)

NA Baro-VNAV NA. DME/DME RNP-0.3 NA. Use Kearney altimeter setting; when not received, use Holdrege altimeter setting and increase all DA 29 feet and all MDA 40 feet, increase LPV all Cats visibility ¼ mile. Circling NA to Rwy 5/23.

MISSED APPROACH: Climb to 3700 direct MEDOC and hold.



| | | |
|--------------------------------|--|---------------------------------|
| EAR AWOS-3PT 123.875 | MINNEAPOLIS CENTER 119.4 278.8 | UNICOM 122.7 (CTAF) Ø |
|--------------------------------|--|---------------------------------|

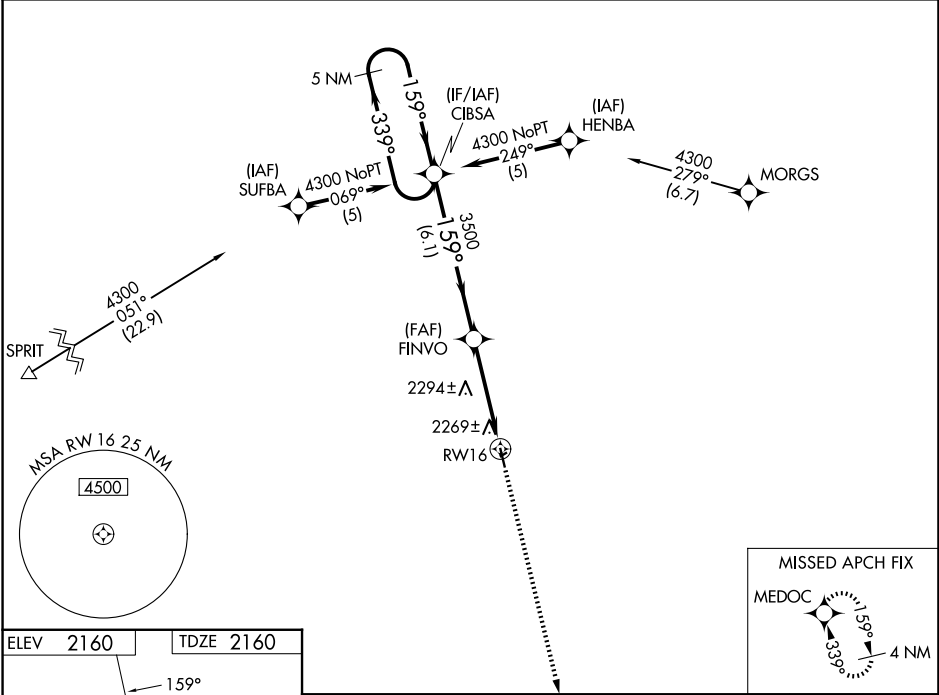

NC-2, 14 MAY 2026 to 11 JUN 2026

NC-2, 14 MAY 2026 to 11 JUN 2026

| | |
|------------------|------------------|
| ELEV 2160 | TDZE 2160 |
|------------------|------------------|

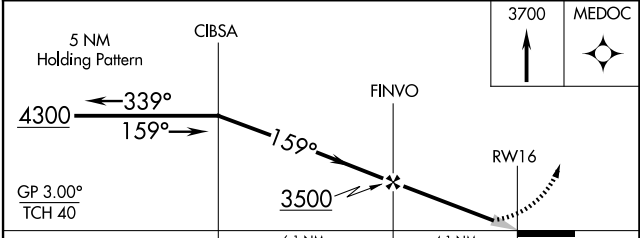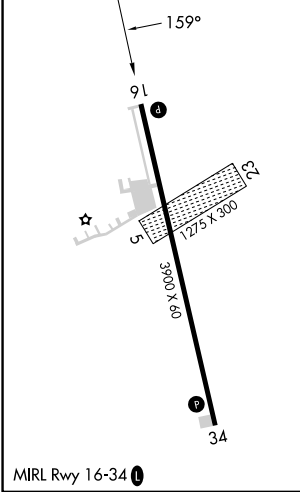

| CATEGORY | A | B | C | D |
|--------------|-----------------------|-----------------------|---|----|
| LPV DA | 2445-1 | 285 (300-1) | | NA |
| LNAV/VNAV DA | 2574-1½ | 414 (500-1½) | | NA |
| LNAV MDA | 2580-1 | 420 (500-1) | | NA |
| CIRCLING | 2680-1 520 (600-1) | 2780-1 620 (700-1) | | NA |