# RNAV (GPS) RWY 22L

## BILL AND HILLARY CLINTON NTL/ADAMS FLD (LIT)

| WAAS | APP CRS | Rwy Ldg | 7200 |
|---|---|---|---|
| CH 42811 | 227° | TDZE | 260 |
| W22A | | Apt Elev | 266 |

RNP APCH.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 48°C. Rwy 22L helicopter visibility reduction below ¾ SM NA. Inop table does not apply to LPV, LNAV/VNAV or LNAV Cat C and D. For inop ALS, increase LNAV Cat A and B visibility to RVR 5000. Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Use of FD or AP required during simultaneous operations.

MALSF

MISSED APPROACH: Climb to 2900 direct MYNIE and on track 224° to BAUDE and hold.

| D-ATIS | LITTLE ROCK APP CON | ADAMS TOWER | GND CON |
|---|---|---|---|
| 125.65 | 135.4 353.6 | 118.7 257.8 | 121.9 339.8 |

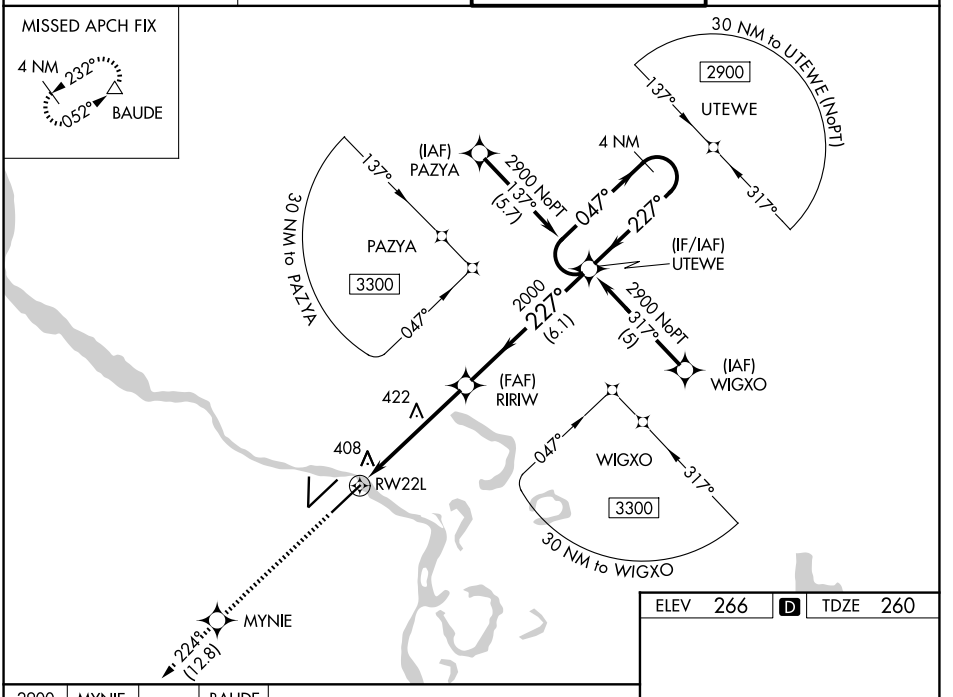


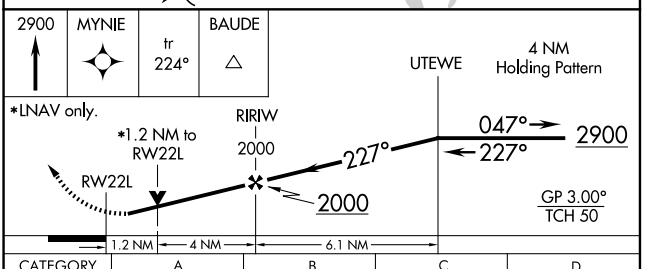


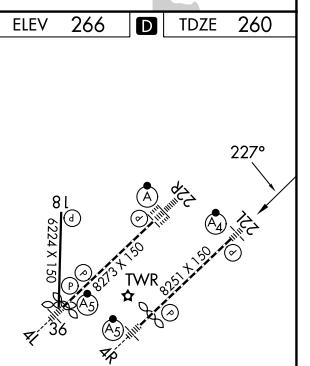


| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| LPV DA | 543/50 283 (300-1) | | | |
| LNAV/VNAV DA | 774-1¾ 514 (600-1¾) | | | |
| LNAV MDA | 680/40 420 (500-¾) | | 680/60 420 (500-1¼) | |
| CIRCLING | 820-1 554 (600-1) | 1000-1 734 (800-1) | 1180-2¾ 914 (1000-2¾) | 1180-3 914 (1000-3) |

MIRL Rwy 18-36
HIRL Rwys 4R-22L and 4L-22R
TDZL/RCLS Rwy 22R



SC-1, 11 JUN 2026 to 09 JUL 2026
SC-1, 11 JUN 2026 to 09 JUL 2026