

LOC/DME I-PDP 108.95 Chan 26 (Y)	APP CRS 268°	Rwy Ldg 27R 8864	27L 9912
		TDZE 11	10
		Apt Elev 36	36

ILS or LOC RWY 27R

PHILADELPHIA INTL (PHL)



DME required.

27R MALSR (AS) 27L MALSR (AS)


MISSED APPROACH: Climb to 1500 then climbing right turn to 3000 on MXE VORTAC R-115 to MXE VORTAC and hold.

For inop ALS, increase S-LOC 27R Cat C/D visibility to 1 3/8 SM.
 ** RVR 1800 authorized with the use of FD or AP or HUD to DA.


D-ATIS 133.4	PHILADELPHIA APP CON 124.35 319.15	PHILADELPHIA TOWER 118.5 327.05 (08/26, 09L/27R, 17/35) 135.1 327.05 (09R/27L)	GND CON 121.9 348.6
------------------------	--	--	-------------------------------

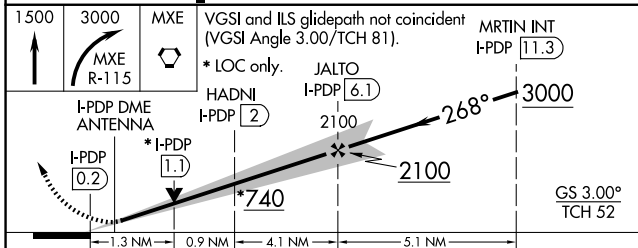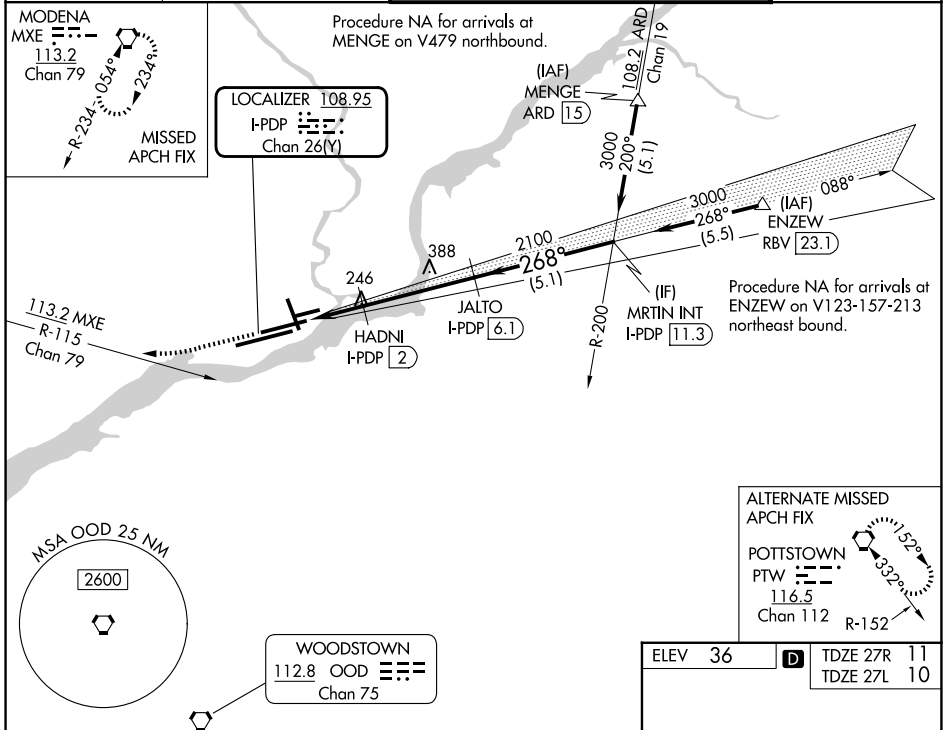

CATEGORY	A	B	C	D
S-ILS 27R **	211/24 200 (200-1/2)			
S-LOC 27R	500/24	489 (500-1/2)	500/50	489 (500-1)
SIDESTEP 27L	500-1	491 (500-1)	500-1 3/8	491 (500-1 3/8)
CIRCLING	540-1 504 (600-1)	600-1 564 (600-1)	620-1 1/2 584 (600-1 1/2)	720-2 1/4 684 (700-2 1/4)



ELEV 36	TDZE 27R 11
	TDZE 27L 10



TDZ/CL Rwy 9R
HIRL all Rwys
REIL Rwys 9L and 35

NE-4, 11 JUN 2026 to 09 JUL 2026

NE-4, 11 JUN 2026 to 09 JUL 2026