


APP CRS	Rwy Ldg	<b>9500</b>
<b>087°</b>	TDZE	<b>13</b>
	Apt Elev	<b>36</b>

# RNAV (RNP) Z RWY 9L

PHILADELPHIA INTL (PHL)


RNP AR APCH - GPS.		MALSRL	MISSED APPROACH: Climb to 3000 on track 087° to CUBUT and on track 173° to FIDAX and on track 259° to OOD VORTAC and hold.
For uncompensated Baro-VNAV systems, procedure NA below -12°C or above 54°C. For inop ALS, increase RNP 0.11 visibility all Cats to RVR 6000 and RNP 0.30 visibility all Cats to 1½ SM.			

D-ATIS	PHILADELPHIA APP CON	PHILADELPHIA TOWER	GND CON
<b>133.4</b>	<b>124.35 319.15</b>	<b>118.5 327.05</b> (08/26, 09L/27R, 17/35) <b>135.1 327.05</b> (09R/27L)	<b>121.9 348.6</b>

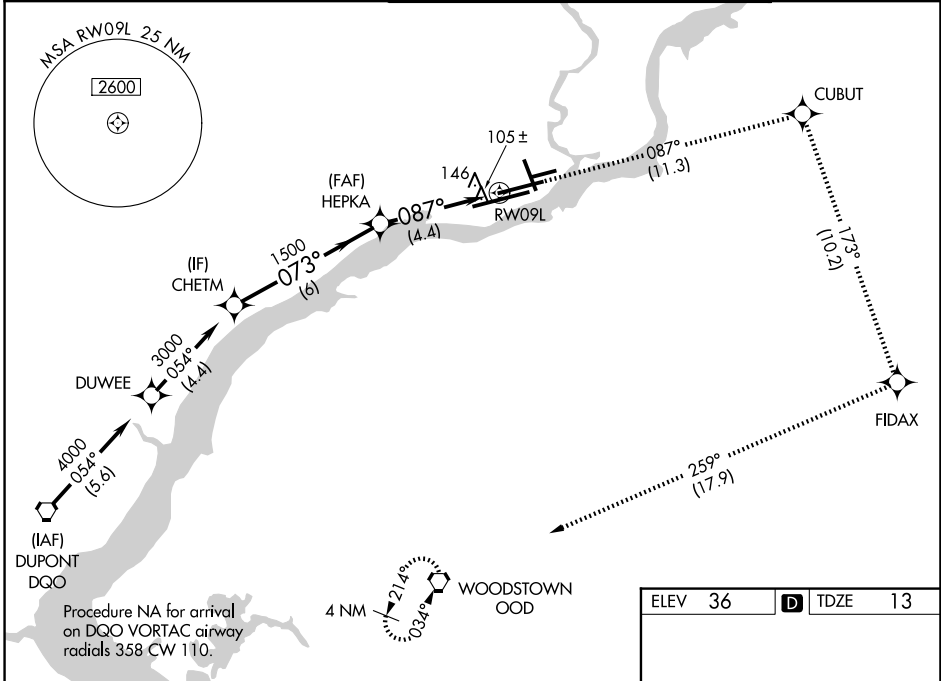

NE-4, 11 JUN 2026 to 09 JUL 2026

NE-4, 11 JUN 2026 to 09 JUL 2026

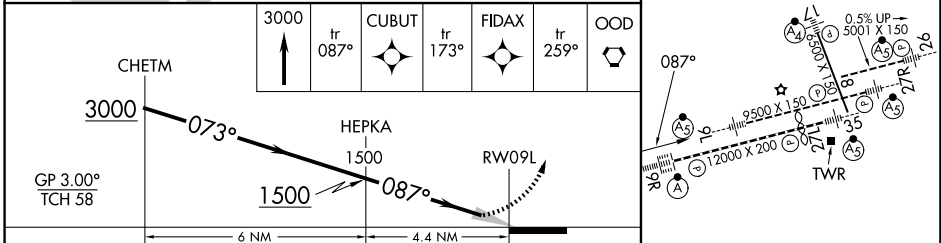

CATEGORY	A	B	C	D
RNP 0.11 DA		382/35	369 (400-%)	
RNP 0.30 DA		434/45	421 (400-%)	

**AUTHORIZATION REQUIRED**

ELEV 36	<b>D</b> TDZE 13
---------	------------------

TDZ/CL Rwy 9R  
HIRL all Rwy's  
REIL Rwy's 9L and 35