

VORTAC CVA <b>113.8</b> Chan <b>85</b>	APP CRS <b>216°</b>	Rwy Ldg TDZE <b>750</b> Apt Elev <b>751</b>
----------------------------------------------	------------------------	---------------------------------------------------



# VOR RWY 21

DAVENPORT MUNI (DVN)

**▼** Rwy 21 helicopter visibility reduction below 1 SM NA. When local altimeter setting not received, use MLL altimeter setting and increase all MDAs 60 feet and S-21 visibility Cat C/D ¼ SM, and Circling visibility Cat C/D ¼ SM.

**MISSED APPROACH:** Climbing right turn to 2400 direct CVA VORTAC and hold.

ASOS <b>120.175</b>	QUAD CITY APP CON * <b>125.95 257.8</b>	CLNC DEL <b>118.35</b>	UNICOM <b>123.0 (CTAF) 0</b>
------------------------	--------------------------------------------	---------------------------	---------------------------------

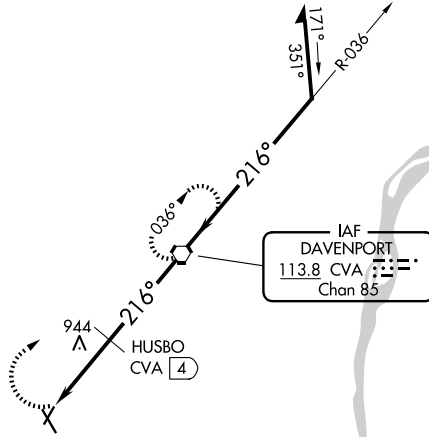

NC-3, 11 JUN 2026 to 09 JUL 2026


NC-3, 11 JUN 2026 to 09 JUL 2026

ELEV 751	TDZE 750
----------	----------

MIRL Rwy 3-21 **1**  
HIRL Rwy 15-33 **1**  
REIL Rwys 3, 21, and 33 **1**

FAF to MAP 7.1 NM

Knots	60	90	120	150	180
Min:Sec	7:06	4:44	3:33	2:50	2:22

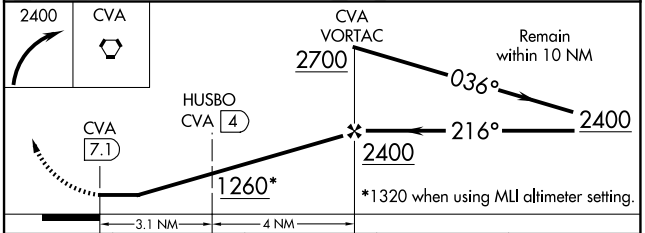

CATEGORY	A	B	C	D
S-21	1260-1 510 (600-1)		1260-1 3/8 510 (600-1 3/8)	
CIRCLING	1300-1 549 (600-1)		1300-1 1/2 549 (600-1 1/2)	1320-2 569 (600-2)
<b>HUSBO FIX MINIMUMS (DME REQUIRED)</b>				
S-21	1200-1 450 (500-1)		1200-1 3/8 450 (500-1 3/8)	
CIRCLING	1300-1 549 (600-1)		1300-1 1/2 549 (600-1 1/2)	1320-2 569 (600-2)