


LOC I-HIB 108.75	APP CRS 310°	Rwy Ldg TDZE Apt Elev	6758 1345 1354
----------------------------	------------------------	-----------------------------	---

ILS or LOC RWY 31

RANGE RGNL (HIB)


VDP NA when using Eveleth altimeter setting. Caution opposing ILS continuously on. When local altimeter setting not received, use Eveleth altimeter setting and increase S-ILS 31 DA to 1581 feet; increase all MDAs 40 feet and increase S-LOC 31 Cat C/D visibility 1/8 SM and Circling Cat C 1/4 SM. Increase BOYAC fix minimums S-LOC 31 Cat C/D visibility 1/8 SM and Circling Cat C 1/4 SM. For inop ALS when using Eveleth altimeter setting, increase BOYAC fix minimums S-LOC 31 Cat C/D visibility to 1 SM. *1780 when using Eveleth altimeter setting. # DME from HIB VOR/DME. DME use requires simultaneous reception of I-HIB and HIB DME.

MALSR




MISSED APPROACH:
Climb to 2500 then climbing right turn to 3600 direct HIB VOR/DME and hold.

ASOS 126.425	DULUTH APP CON 125.45 233.7	UNICOM 123.0 (CTAF)
------------------------	---------------------------------------	-------------------------------

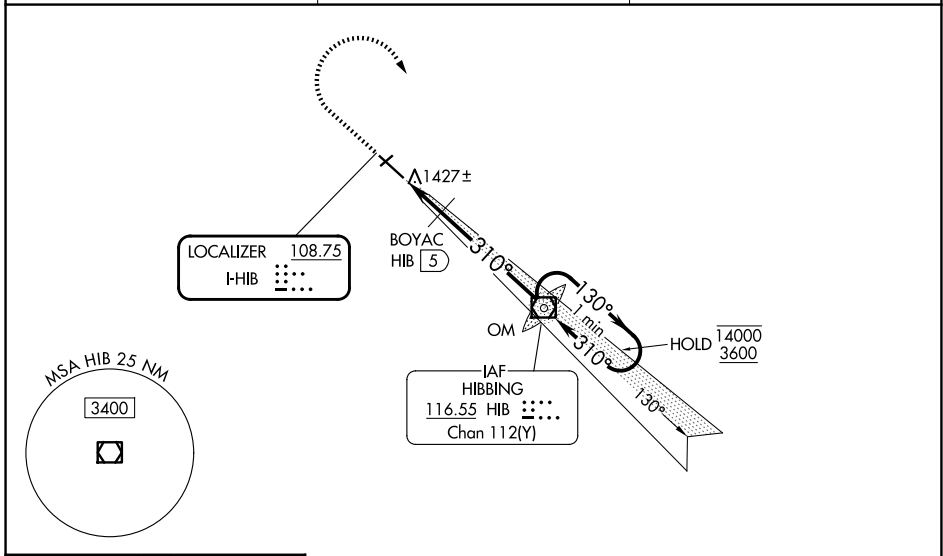

ELEV 1354	D	TDZE 1345
-----------	----------	-----------

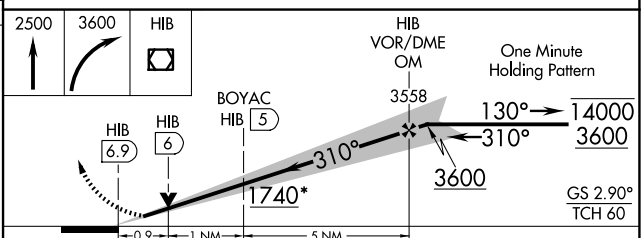

HIRL Rwy 13-31

FAF to MAP 6.9 NM

Knots	60	90	120	150	180
Min:Sec	6:54	4:36	3:27	2:46	2:18

CATEGORY	A	B	C	D
S-ILS 31	1545-1/2 200 (200-1/2)			
S-LOC 31	1740-1/2	395 (400-1/2)	1740-5/8	395 (400-5/8)
CIRCLING	1900-1	546 (600-1)	1920-1 1/2	1980-2
			566 (600-1 1/2)	626 (700-2)
# BOYAC FIX MINIMUMS				
S-LOC 31	1680-1/2 335 (400-1/2)			
CIRCLING	1900-1	546 (600-1)	1920-1 1/2	1980-2
			566 (600-1 1/2)	626 (700-2)

NC-1, 11 JUN 2026 to 09 JUL 2026

NC-1, 11 JUN 2026 to 09 JUL 2026