

WAAS CH 49016 W34A	APP CRS 346°	Rwy Ldg 6101
		TDZE 5012
		Apt Elev 5024

RNAV (GPS) RWY 34

MC CALL MUNI (MYL)



RNP APCH - GPS.

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -24°C or above 40°C. When local altimeter setting not received, procedure NA. Rwy 34 helicopter visibility reduction below 3/4 SM NA. Circling Rwy 16 NA at night.

⚠ MISSED APPROACH: Climb to 5600, then climbing left turn to 2430 direct WADPO and on track 243° to SUMOQ and hold, continue climb-in-hold to 12000.

***** Missed approach requires minimum climb of 265 feet per NM to 6380.

ASOS 119.925	SALT LAKE CENTER 128.05 306.95	UNICOM 122.8 (CTAF) 0
------------------------	--	---------------------------------

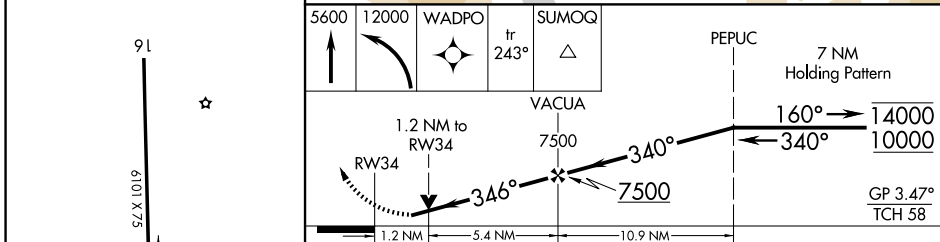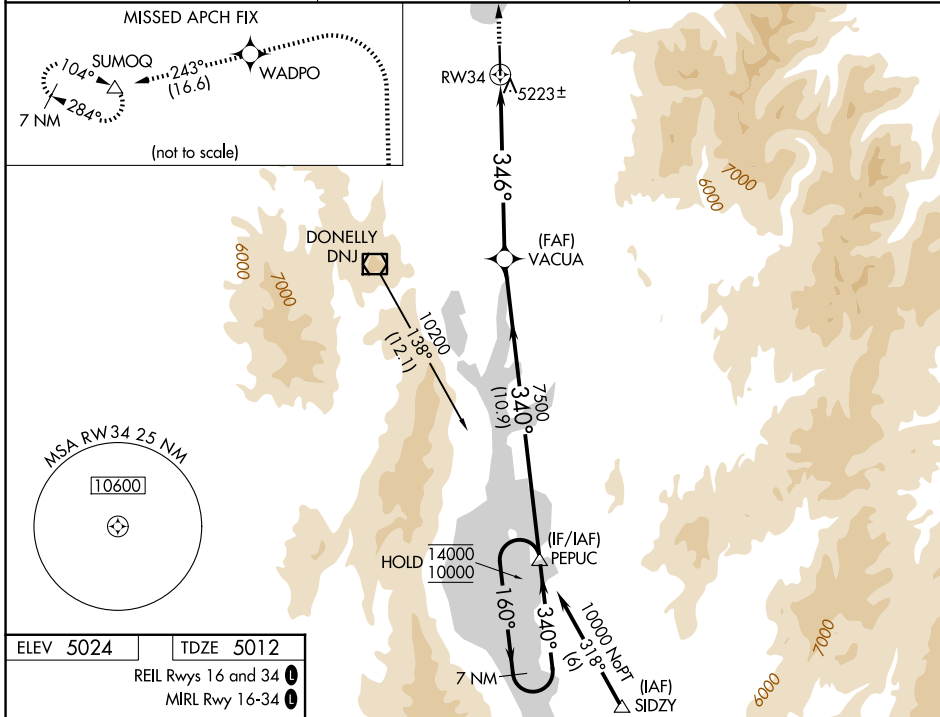

CATEGORY	A	B	C	D
LPV DA	5375-1 363 (400-1)			
LNAV/VNAV DA	5683-1 671 (700-1 1/2)			
LNAV MDA*	5520-1	508 (500-1)	5520-1 3/8	508 (500-1 3/8)
LNAV MDA	5680-1	668 (700-1)	5680-1 7/8	668 (700-1 7/8)
CIRCLING	5700-1 676 (700-1)	5920-1 1/4 896 (900-1 1/4)	6140-3 1116 (1200-3)	6660-3 1636 (1700-3)

NW-1, 11 JUN 2026 to 09 JUL 2026

NW-1, 11 JUN 2026 to 09 JUL 2026