

WAAS CH 99418 W35A	APP CRS 355°	Rwy Ldg TDZE 2563 Apt Elev 2573
--	------------------------	---

RNAV (GPS) RWY 35



BIG SPRING/MC MAHON-WRINKLE (BPG)

RNP APCH - GPS.

Baro-VNAV and VDP NA when using MAF altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C or above 43°C. VDP NA with Midland Intl Air and Space Port altimeter setting. When local altimeter setting not received, use MAF altimeter setting: increase LPV DA to 2943 feet; increase LNAV/VNAV DA to 3109 feet and all visibilities ¼ SM; increase all MDAs 140 feet and LNAV visibility Cat C ¾ SM and LNAV visibility Cat D ¼ SM.

MISSED APPROACH: Climb to 5200 direct YALUT and hold.

AWOS-3PT 118.025	FORT WORTH CENTER 133.7 350.2	UNICOM 122.8 (CTAF) 0
----------------------------	---	---------------------------------

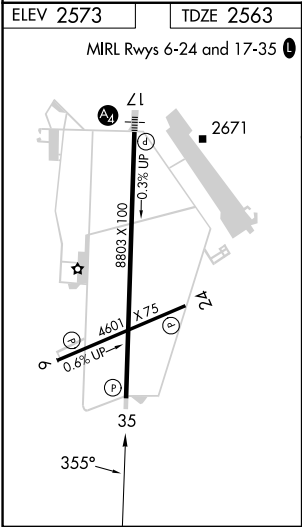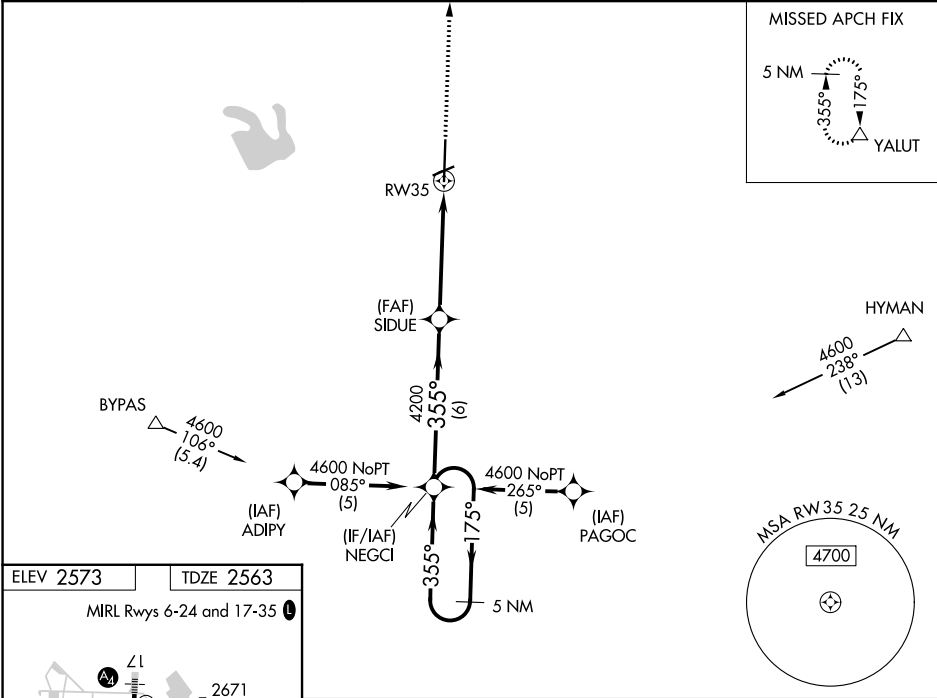

5 NM Holding Pattern				5200	YALUT
NEGCI				↑	△
GP 3.00° TCH 36				1.5 NM to RWY 35	
				6 NM	3.5 NM
CATEGORY	A	B	C	D	
LPV DA	2813-1 250 (300-1)				
LNAV/VNAV DA	2979-1½ 416 (500-1½)				
LNAV MDA	3060-1	497 (500-1)	3060-1¾ 497 (500-1¾)	3060-1½ 497 (500-1½)	

SC-2, 09 JUL 2026 to 06 AUG 2026

SC-2, 09 JUL 2026 to 06 AUG 2026