

WAAS CH 50530 W29B	APP CRS 292°	Rwy Ldg TDZE Apt Elev	8008 331 336
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 29L


FRESNO YOSEMITE INTL (FAT)

▼


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 0°C (32°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH: Climb to 2000 direct WOSIM and hold.

ATIS 121.35 273.6	FRESNO APP CON 119.6 351.95	FRESNO TOWER 118.2 251.1	GND CON 121.7 348.6
-----------------------------	---------------------------------------	------------------------------------	-------------------------------

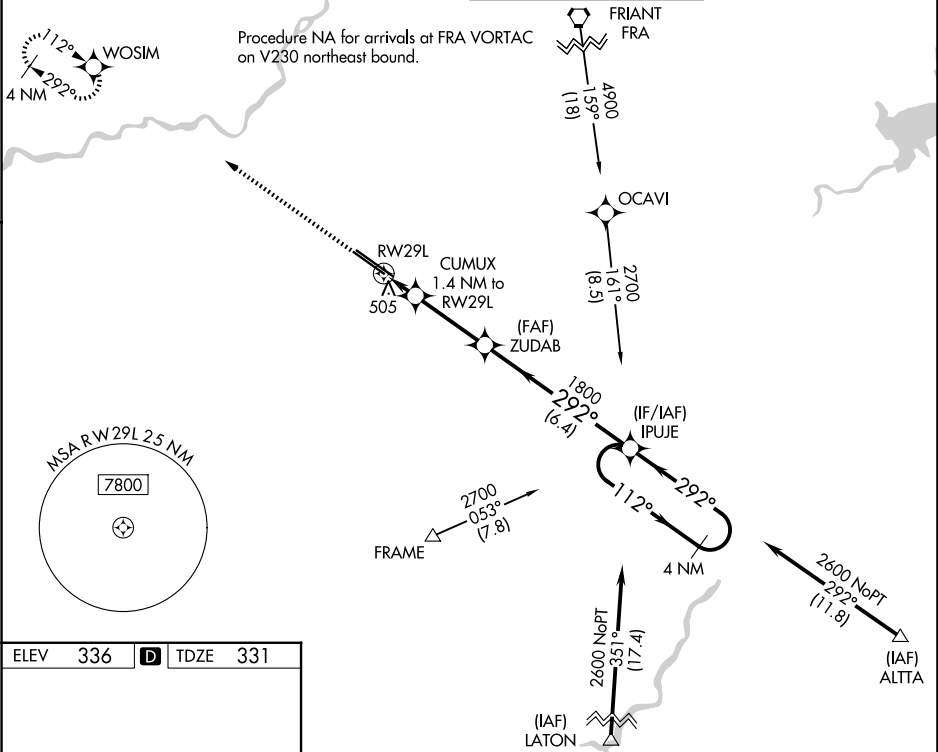

ELEV	336	D	TDZE	331
------	-----	----------	------	-----

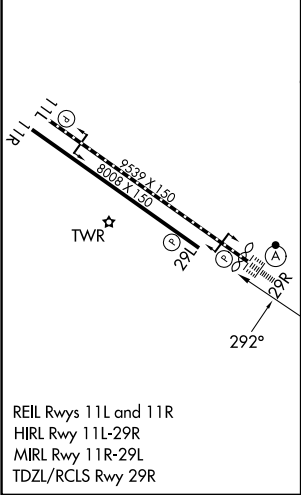

2000

WOSIM

*LNAV only.

CUMUX 1.4 NM to RW29L

RW29L

*820

ZUDAB 1800

IPUJE 4 NM Holding Pattern

112°

292°

2600

GP 3.00° TCH 52

CATEGORY	A	B	C	D
LPV DA	581-¾ 250 (300-¾)			
LNAV/VNAV DA	667-1⅛ 336 (400-1⅛)			
LNAV MDA	760-1	429 (500-1)	760-1¼	429 (500-1¼)
CIRCLING	820-1	484 (500-1)	920-1½ 584 (600-1½)	920-2 584 (600-2)