
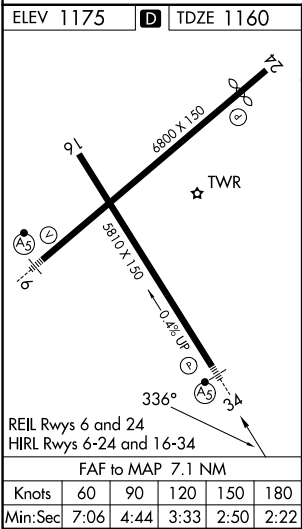



LOC I-ROA 109.7	APP CRS 336°	Rwy Ldg TDZE 1160 Apt Elev 1175
---------------------------	------------------------	---

ILS or LOC RWY 34

ROANOKE/BLACKSBURG RGNL (WOODRUM FLD) (R.O.A)

DME required for procedure entry. ADF or RADAR required.		MALSR 	MISSED APPROACH: Climb to 2300 then climbing left turn to 4500 direct VIT NDB and hold. Continue climb-in-hold to 4500. # Missed approach requires minimum climb of 425 feet per NM to 3700.
	For inop ALS, increase S-ILS 34 # all Cats visibility to 1 3/8 SM. Circling NA northwest of Rwy 6-24. -12°C Inop table does not apply to S-ILS 34 all Cats.		
ATIS 132.375	ROANOKE APP CON 133.225 339.8	ROANOKE TOWER 118.3 257.8	GND CON 121.9 257.8

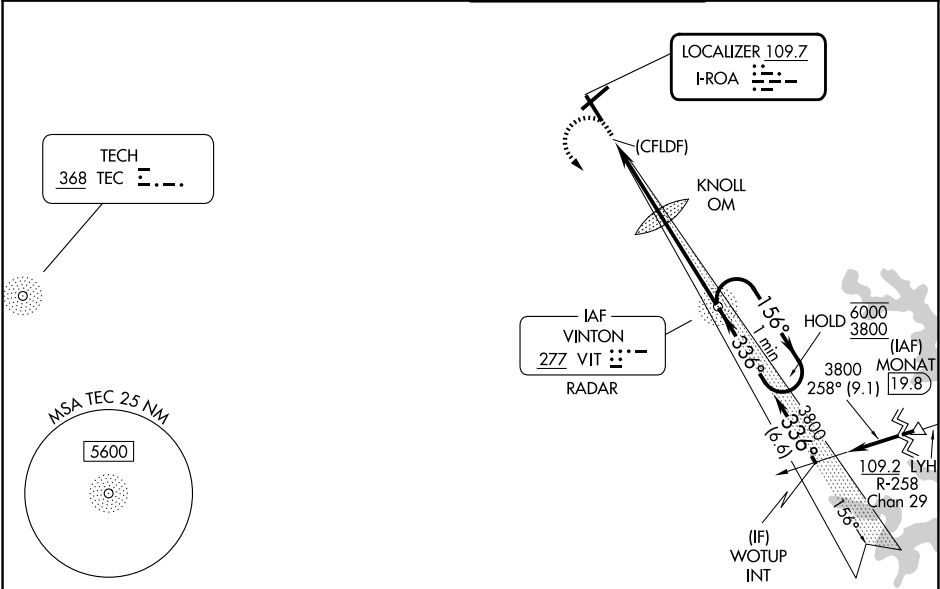

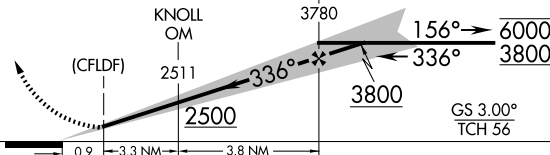Procedure NA for arrivals at MONAT on V470 northeast bound.				
2300 	4500 	VIT 	One Minute Holding Pattern	
				
CATEGORY	A	B	C	D
S-ILS 34 #	1603-7/8		443 (500-7/8)	
S-ILS 34	2040-4		880 (900-4)	
S-LOC 34	2140-3/4 980 (1000-3/4)	2140-1 980 (1000-1)	2140-2 1/2 1285 (1300-3)	980 (1000-2 1/2) 1625 (1700-3)
CIRCLING	2140-1 1/4 965 (1000-1 1/4)	2140-1 1/2 965 (1000-1 1/2)	2460-3 1285 (1300-3)	2800-3 1625 (1700-3)