
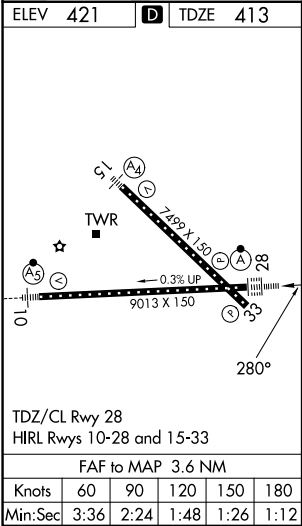


LOC/DME I-SYR 109.9 Chan 36	APP CRS 280°	Rwy Ldg TDZE Apt Elev	9013 413 421
---	------------------------	-----------------------------	---

ILS or LOC RWY 28
SYRACUSE HANCOCK INTL (SYR)

DME or RADAR required.		ALSf-2	MISSED APPROACH: Climb to 1100 then climbing right turn to 3000 direct SYR VORTAC and hold, continue climb-in-hold to 3000.
ATIS 124.225	SYRACUSE APP CON 126.125 269.125	SYRACUSE TOWER 120.3 239.0	GND CON 121.7 348.6

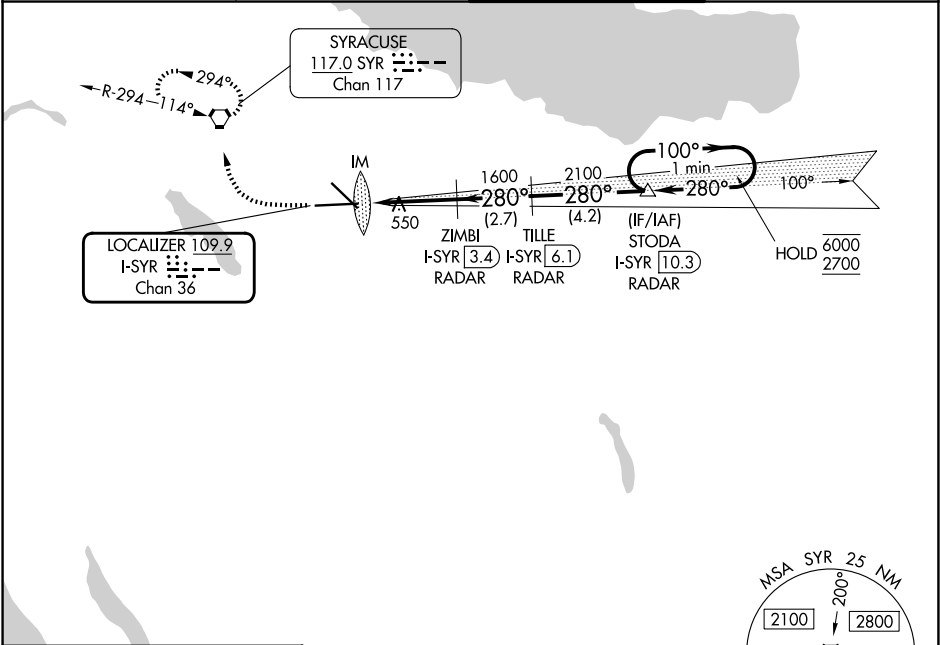

1100 ↑		3000 ↗		SYR 		*LOC only		STODA I-SYR 10.3 RADAR		One Minute Holding Pattern	
						ZIMBI I-SYR 3.4 RADAR		TILLE I-SYR 6.1 RADAR			
DME ANTENNA		I-SYR 0.2 		IM		*I-SYR 0.9 ↓		1600		100° → 6000 ← 280° 2700	
								280°		2100	
						1600				GS 3.00° TCH 60	
0.2		0.9		2.5 NM		2.7 NM		4.2 NM			
CATEGORY		A		B		C		D			
S-ILS 28				613/18		200 (200-½)					
S-LOC 28		800/24		387 (400-½)		800/35		387 (400-¾)			
CIRCLING		900-1 479 (500-1)		920-1 499 (500-1)		1020-1½ 599 (600-1½)		1180-2½ 759 (800-2½)			