

VORTAC TUL 114.4 Chan 91	APP CRS 262°	Rwy Ldg 7376 TDZE 652 Apt Elev 678
--	------------------------	---


VOR Y or TACAN Y RWY 26
TULSA INTL (TUL)

T Circling NA for Cat E south of Rwy 8-26. VOR Minimums: For inop ALS, increase Cat A/B visibility to 1 SM and Cat E to 1½ SM.
A HUKDO Minimums: For inop ALS, increase Cat A/B visibility to 1 SM and Cat E to 1¼ SM.
 ASR




MISSED APPROACH: Climbing left turn to 2600 on heading 220° and on TUL VORTAC R-238 to KEVIL INT/TUL 25.4 DME and hold.

D-ATIS 124.9 377.2	TULSA APP CON 124.0 338.3	TULSA TOWER 121.2 310.8 (08/26, 18L/36R) 118.7 257.8 (18R/36L)	GND CON 121.9 348.6
------------------------------	-------------------------------------	--	-------------------------------

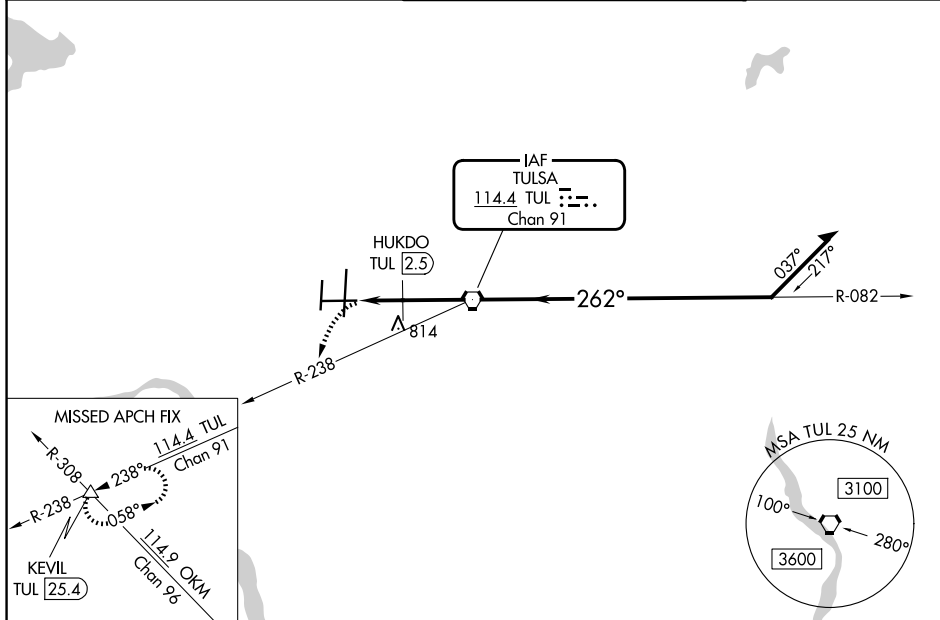


ELEV 678	D	TDZE 652
----------	----------	----------



TDZ/CL Rwy 36R
HIRL Rwys 8-26, 18L-36R and 18R-36L
REIL Rwys 8, 18R and 36L

FAF to MAP 4.2 NM

Knots	60	90	120	150	180
Min:Sec	4:12	2:48	2:06	1:41	1:24

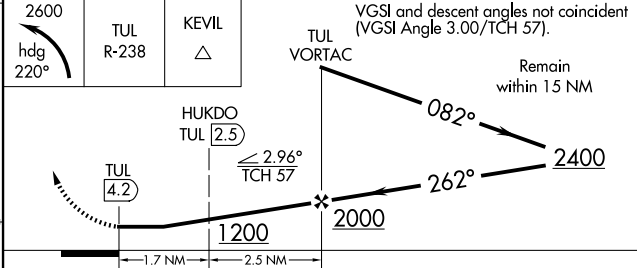

CATEGORY	A	B	C	D	E
S-26	1200- ³ / ₄	548 (600- ³ / ₄)	1200-1 ¹ / ₄	548 (600-1 ¹ / ₄)	
CIRCLING	1200-1	522 (600-1)	1520-2 ¹ / ₂ 842 (900-2 ¹ / ₂)	1520-2 ³ / ₄ 842 (900-2 ³ / ₄)	1520-3 842 (900-3)
HUKDO FIX MINIMUMS					
S-26			1080- ³ / ₄	428 (500- ³ / ₄)	
CIRCLING	1120-1 442 (500-1)	1160-1 482 (500-1)	1520-2 ¹ / ₂ 842 (900-2 ¹ / ₂)	1520-2 ³ / ₄ 842 (900-2 ³ / ₄)	1520-3 842 (900-3)

TULSA, OKLAHOMA
Amdt 24F 05SEP24

36°12'N-95°53'W

TULSA INTL (TUL)

VOR Y or TACAN Y RWY 26