

APP CRS
317°

Rwy Ldg
TDZE
Apt Elev

7200
589
589

RNAV (GPS) RWY 32

TERRE HAUTE RGNL (HUF')

RNP APCH.


VDP NA when using Paris altimeter setting. Rwy 32 helicopter visibility reduction below ¾ SM NA.

When local altimeter setting not received, use Paris altimeter setting and increase all MDAs 80 feet, LNAV Cat C/D visibility to 1 ¾ SM and Circling Cat C/D ¼ SM.

MISSED APPROACH:

Climb to 2600 direct JOSTO and hold.

ATIS 127.5 269.375	HULMAN APP CON 125.45 339.8	HULMAN TOWER 134.725 322.475	GND CON 121.6 348.6
-----------------------	--------------------------------	---------------------------------	------------------------

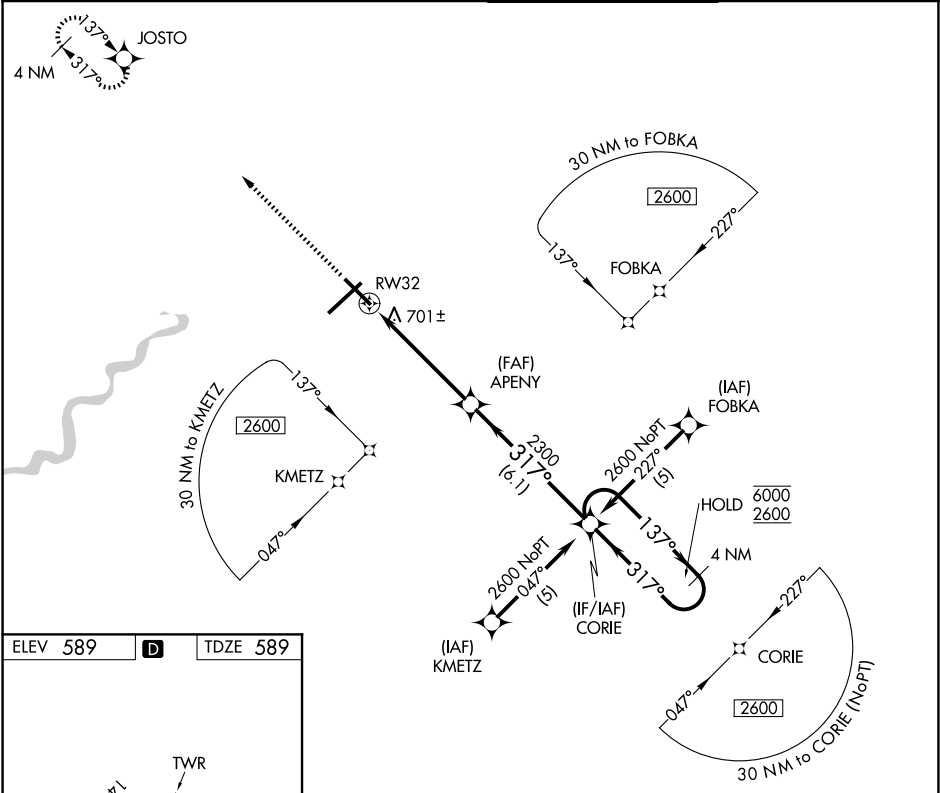

ELEV 589

D

TDZE 589

TWR

23

5

317°

8021 X 150

7200 X 150

REIL Rws 14, 23 and 32

HIRL Rws 5-23 and 14-32

2600 JOSTO

*LNAV only.

*0.9 NM to RW32

APENY

RW32

3.04°

TCH 50

0.9

4.2 NM

6.1 NM

CORIE

4 NM Holding Pattern

137°

317°

6000

2600

CATEGORY	A	B	C	D
LNAV MDA	980-1	391 (400-1)	980-1 1/8 391 (400-1 1/8)	980-1 1/4 391 (400-1 1/4)
CIRCLING	1040-1	451 (500-1)	1220-1 3/4 631 (700-1 3/4)	1220-2 631 (700-2)